SIEMENS

Data sheet 3RK2200-0CQ00-0AA3



AS-i Compact Module K60 digital A/B device, 4 DI, IP67, 4 x input, maximum 200 mA 4 x M12 socket Y-II assignment mounting plate 3RK1901-0CA00 must be ordered separately

General technical data	
design of the product	digital I/O modules for operation in the field, IP67 - K60
Type	4 inputs
design of the slave type	A/B slave
I/O configuration	0
ID/ID2 code	A/E
Number I/O sockets	4
type of electrical connection of the inputs and outputs	M12 screw-type terminals
AS interface total current input max	270 mA
operating voltage according to AS-Interface spezification	18 ... 31.6 V
Ground terminal	PIN5 of each M12 socket is connected to the grounding wrist strap in the mounting plate using a pin
Addressing	front addressing socket
Delivery note	the modules are delivered without mounting plate
Sensor supply	
type of voltage supply for sensor supply	using AS-Interface
input voltage	16.5 ... 30 V
property of the sensor supply short-circuit and overload resistant	Yes
ampacity of the sensor supply for all inputs	
● at ambient temperature 40 °C	200 mA
Inputs	
number of digital inputs	4
type of connection technology	2- and 3-wire technology
Input circuit	PNP transistor
type of voltage of the input voltages	DC
Inputs switching level High min	10 V
input current at digital input	
● for signal <1> minimum	6 mA
● with signal <0> maximum	1.5 mA
Inputs	
● sensor supply using AS-Interface	short-circuit and overload resistant
● socket assignment	
— PIN 1	sensor supply L+
— PIN 2	data input II
— PIN 3	sensor supply L-
— PIN 4	data input I
— PIN 5	ground terminal
design of the pin assignment of the inputs	Y-II assignement
Outputs	
number of digital outputs	0

Subject to change without notice
© Copyright Siemens

Outputs external power supply 24 V DC	not required
Outputs	
● watchdog	not required
Assignment of the data bits	
Assignment of data bits	
● socket	PIN 4 = IN1 (D0), PIN 2 = IN2 (D1)
● socket 2	PIN 4 = IN2 (D1)
● socket 3	PIN 4 = IN3 (D2) , PIN 2 = IN4 (D3)
● socket 4	PIN 4 = IN4 (D3)
● socket 5	not assigned (closed)
● socket 6	not assigned (closed)
● socket 7	not assigned (closed)
● socket 8	not assigned (closed)
Ambient conditions	
ambient temperature	
● during operation	-25 ... +85 °C
● during storage	-40 ... +85 °C
protection class IP	IP67
Display	
Status display	
● display of I/Os	yellow LED
● display of Uaux	not required
● display of AS-Interface/diagnostics	green/red LED
Mechanical data	
width	60 mm
height	152 mm
depth	29 mm
fastening method	standard rail mounting/wall mounting using mounting plate for K60 compact module
shock resistance	15g / 11 ms

Certificates/ approvals


General Product Approval	EMV	Maritime application


other		Environment	Industrial Communication
	Confirmation Miscellaneous	Environmental Confirmations	

Further information


Information on the packaging
https://support.industry.siemens.com/cs/ww/en/view/109813875
Information for data generation and storage
https://support.industry.siemens.com/cs/ww/en/view/109995012
Information- and Downloadcenter (Catalogs, Brochures,…)
https://www.siemens.com/ic10
Industry Mall (Online ordering system)
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RK2200-0CQ00-0AA3
Cax online generator
https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK2200-0CQ00-0AA3
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
https://support.industry.siemens.com/cs/ww/en/ps/3RK2200-0CQ00-0AA3
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)
https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK2200-0CQ00-0AA3&lang=en

Subject to change without notice
© Copyright Siemens

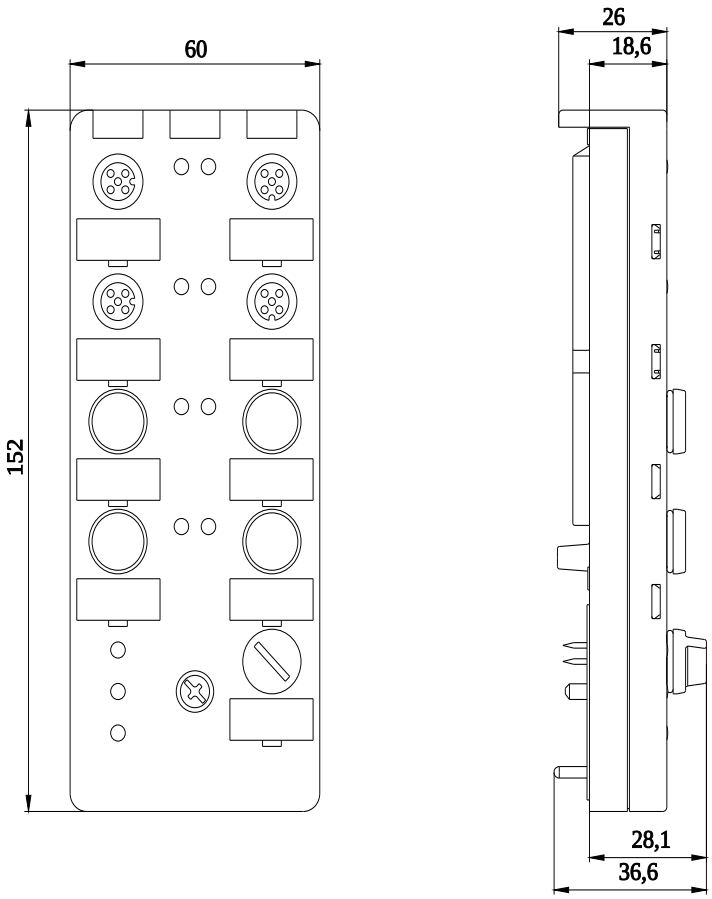

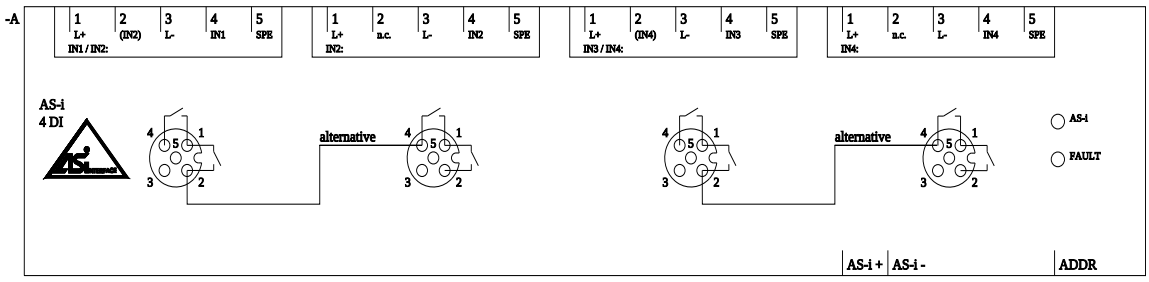

Subject to change without notice
© Copyright Siemens

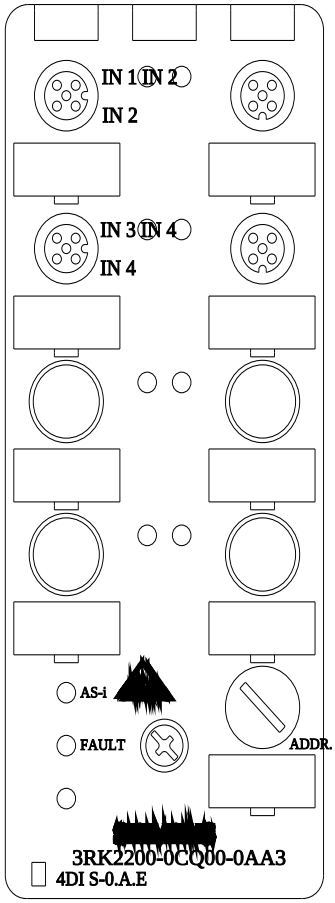

last modified: 4/1/2025

Subject to change without notice
© Copyright Siemens