SIEMENS

## Data sheet 3SE5000-0CA00-1AC1



Contact block for position switch 3SE51/52 1 NO/1 NC quick action contact gold-plated contacts

| | |
|---|---|
| **product brand name** | SIRIUS |
| **product designation** | contact |
| **product type designation** | 3SE5 |
| **General technical data** | |
| product function positive opening | Yes |
| **insulation voltage rated value** | 400 V |
| **degree of pollution** | class 3 |
| **surge voltage resistance rated value** | 6 kV |
| **protection class IP** | IP00 |
| **shock resistance** | |
| ● **according to IEC 60068-2-27** | 30g / 11 ms |
| **vibration resistance** | |
| ● **according to IEC 60068-2-6** | 0.35 mm/5g |
| **mechanical service life (operating cycles) typical** | 15 000 000 |
| **electrical endurance (operating cycles) at AC-15 at 230 V typical** | 100 000 |
| **thermal current** | 10 A |
| **reference code according to IEC 81346-2** | S |
| **continuous current of the C characteristic MCB** | 1 A; for a short-circuit current smaller than 400 A |
| **continuous current of the quick DIAZED fuse link** | 10 A; for a short-circuit current smaller than 400 A |
| **continuous current of the DIAZED fuse link gG** | 6 A |
| **active principle** | mechanical |
| **repeat accuracy** | 0.1 mm |
| **Substance Prohibitance (Date)** | 07/01/2006 |
| **Weight** | 0.025 kg |
| **width of the sensor** | 25 mm |
| **Ambient conditions** | |
| **ambient temperature** | |
| ● during operation | -25 ... +85 °C |
| ● during storage | -40 ... +90 °C |
| **explosion protection category for dust** | none |
| **Main circuit** | |
| **operating frequency rated value** | 50 ... 60 Hz |
| **number of NC contacts for auxiliary contacts** | 1 |
| **number of NO contacts for auxiliary contacts** | 1 |
| **operational current at AC-15** | |
| ● at 24 V rated value | 6 A |
| ● at 125 V rated value | 6 A |
| ● at 240 V rated value | 6 A |
| ● at 400 V rated value | 4 A |


Subject to change without notice
© Copyright Siemens

| | |
|---|---|
| **operational current at DC-13** | |
| ● at 24 V rated value | 3 A |
| ● at 125 V rated value | 0.55 A |
| ● at 250 V rated value | 0.27 A |
| ● at 400 V rated value | 0.12 A |
| **Enclosure** | |
| **coating of the enclosure** | Other types |
| **Drive Head** | |
| **design of the switching function** | positive opening |
| **circuit principle** | snap-action contacts |
| number of switching contacts safety-related | 1 |
| **Installation/ mounting/ dimensions** | |
| **mounting position** | any |
| **fastening method** | snap-on mounting |
| **Connections/ Terminals** | |
| **type of electrical connection** | screw terminal |
| **type of connectable conductor cross-sections** | |
| ● solid | 1x (0.5 ... 1.5 mm²), 2x (0.5 ... 0.75 mm²) |
| ● finely stranded with core end processing | 1x (0.5 ... 1.5 mm²), 2x (0.5 ... 0.75 mm²) |
| ● for AWG cables solid | 1x (20 ... 16), 2x (20 ... 18) |
| ● for AWG cables stranded | 1x (20 ... 16), 2x (20 ... 18) |
| design of the interface for safety-related communication | without |
| **Communication/ Protocol** | |
| **design of the interface** | without |
| **Approvals Certificates** | |
| **General Product Approval** | |


KC

| Functional Saftey | Test Certificates | other | | Environment |
|---|---|---|---|---|
| Type Examination Certificate | Type Test Certificates/Test Report | 产品合格 QC PASS | Confirmation | Environmental Confirmations |

**Further information**

**Information on the packaging**
https://support.industry.siemens.com/cs/ww/en/view/109813875
**Information for data generation and storage**
https://support.industry.siemens.com/cs/ww/en/view/109995012
**Information- and Downloadcenter (Catalogs, Brochures,…)**
https://www.siemens.com/ic10
**Industry Mall (Online ordering system)**
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SE5000-0CA00-1AC1
**Cax online generator**
https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SE5000-0CA00-1AC1
**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**
https://support.industry.siemens.com/cs/ww/en/ps/3SE5000-0CA00-1AC1
**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**
https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SE5000-0CA00-1AC1&lang=en


Subject to change without notice
© Copyright Siemens

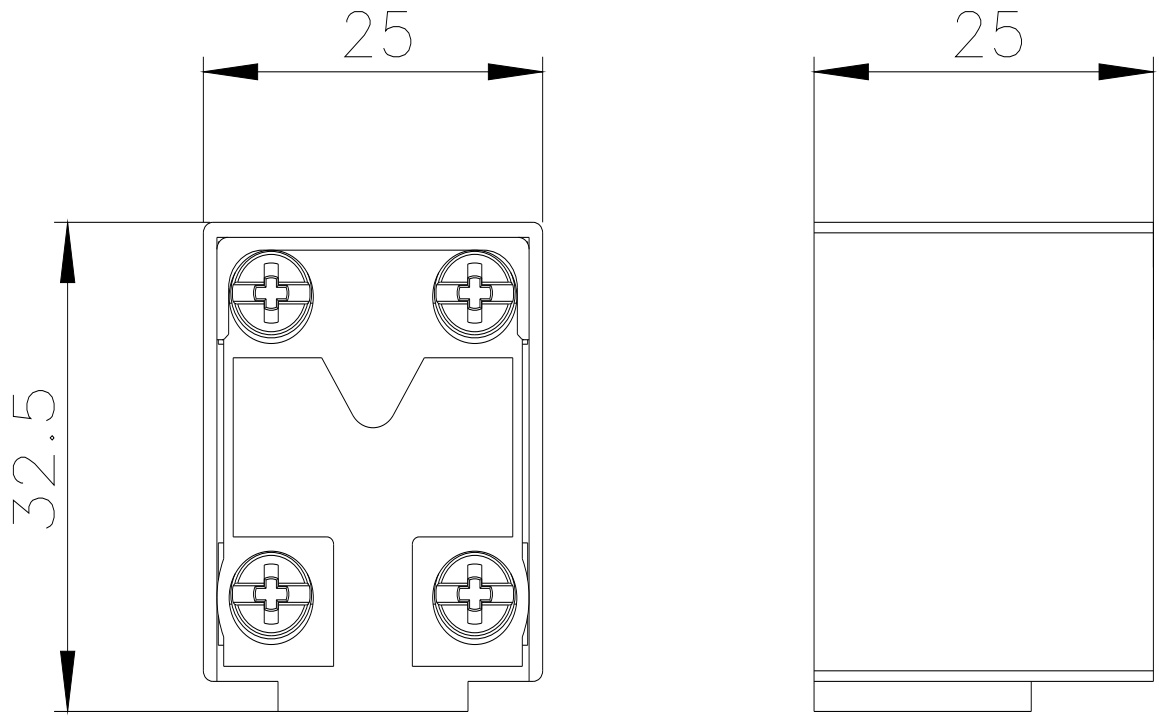


**last modified:** 4/2/2025


Subject to change without notice
© Copyright Siemens