

Label holder, 22mm, flat, Frame rounded off at the bottom black, for labeling plate 27mm x 27mm, for snapping on

|                                                                     |                               |                   |                      |
|---------------------------------------------------------------------|-------------------------------|-------------------|----------------------|
| product brand name                                                  | SIRIUS ACT                    |                   |                      |
| product designation                                                 | Label holder                  |                   |                      |
| design of the product                                               | for labeling plate 27 x 27 mm |                   |                      |
| product type designation                                            | 3SU1                          |                   |                      |
| General technical data                                              |                               |                   |                      |
| protection class IP                                                 | IP66, IP67, IP69(IP69K)       |                   |                      |
| degree of protection NEMA rating                                    | 1, 2, 3, 3R, 4, 4X, 12        |                   |                      |
| shock resistance for railway applications according to EN 61373     | Category 1, Class B           |                   |                      |
| vibration resistance for railway applications according to EN 61373 | Category 1, Class B           |                   |                      |
| Substance Prohibittance (Date)                                      | 10/01/2014                    |                   |                      |
| Weight                                                              | 0.002 kg                      |                   |                      |
| Ambient conditions                                                  |                               |                   |                      |
| ambient temperature                                                 |                               |                   |                      |
| • during operation                                                  | 70 ... -25 °C                 |                   |                      |
| • during storage and transport                                      | 80 ... -40 °C                 |                   |                      |
| Environmental footprint                                             |                               |                   |                      |
| Environmental Product Declaration(EPD)                              | Yes                           |                   |                      |
| global warming potential [CO2 eq] total                             | 0.787 kg                      |                   |                      |
| global warming potential [CO2 eq] during manufacturing              | 0.566 kg                      |                   |                      |
| global warming potential [CO2 eq] during operation                  | 0.235 kg                      |                   |                      |
| global warming potential [CO2 eq] after end of life                 | -0.015 kg                     |                   |                      |
| Installation/ mounting/ dimensions                                  |                               |                   |                      |
| height                                                              | 59.8 mm                       |                   |                      |
| width                                                               | 29.8 mm                       |                   |                      |
| Accessories                                                         |                               |                   |                      |
| material of accessory                                               | Plastic                       |                   |                      |
| shape of label holder                                               | rounded below                 |                   |                      |
| color of label holder                                               | Black                         |                   |                      |
| fastening method of label                                           | snap on                       |                   |                      |
| Approvals Certificates                                              |                               |                   |                      |
| General Product Approval                                            |                               | Test Certificates | Maritime application |



[Type Test Certificates/Test Report](#)



Maritime application

other

Environment



[Confirmation](#)



## Environment

Siemens  
EcoTech



[Environmental Confirmations](#)

## Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SU1900-0AT10-0AA0>

Cax online generator


<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SU1900-0AT10-0AA0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3SU1900-0AT10-0AA0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[https://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3SU1900-0AT10-0AA0&lang=en](https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SU1900-0AT10-0AA0&lang=en)

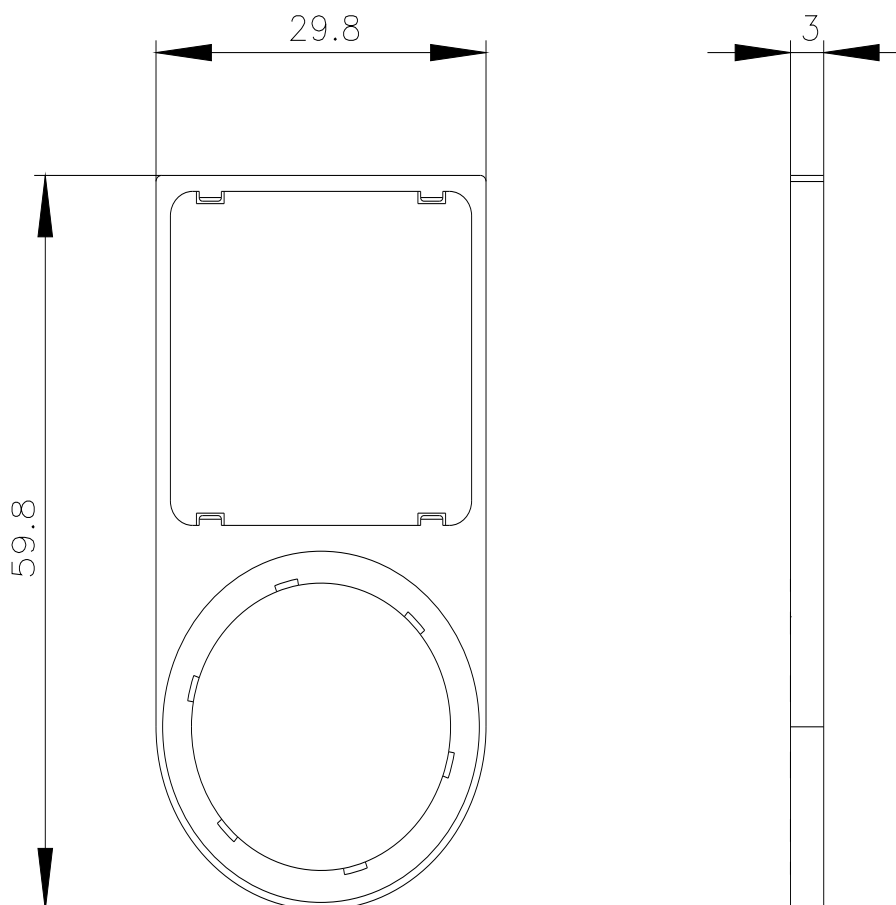

last modified:

4/2/2025