




locking device made of metal, for activated mushroom pushbutton 30 mm or 40 mm, 22 mm design

product brand name	SIRIUS ACT		
product designation	Locking device		
design of the product	for mushroom pushbuttons D30, D40		
product type designation	3SU1		
General technical data			
protection class IP	IP66, IP67, IP69(IP69K)		
Substance Prohibittance (Date)	10/01/2014		
Weight	47 g		
Ambient conditions			
ambient temperature			
• during storage	-40 ... +80 °C		
Environmental footprint			
Environmental Product Declaration(EPD)	Yes		
global warming potential [CO2 eq] total	0.593 kg		
global warming potential [CO2 eq] during manufacturing	0.625 kg		
global warming potential [CO2 eq] during operation	0.235 kg		
global warming potential [CO2 eq] after end of life	-0.267 kg		
Installation/ mounting/ dimensions			
height	43.1 mm		
width	47 mm		
depth	25.1 mm		
Accessories			
material of accessory	Metal		
color of accessory	Silver		
Approvals Certificates			
General Product Approval		Test Certificates	Maritime application

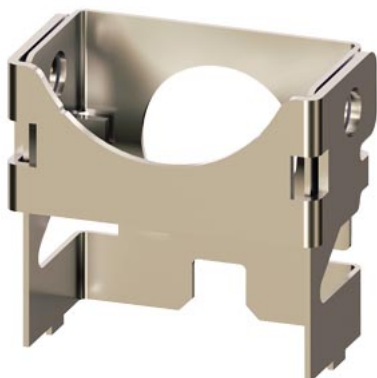

[Type Test Certificates/Test Report](#)



Maritime application

other

Environment



[Confirmation](#)



Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SU1950-0DP80-0AA0>

Cax online generator


<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SU1950-0DP80-0AA0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3SU1950-0DP80-0AA0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SU1950-0DP80-0AA0&lang=en

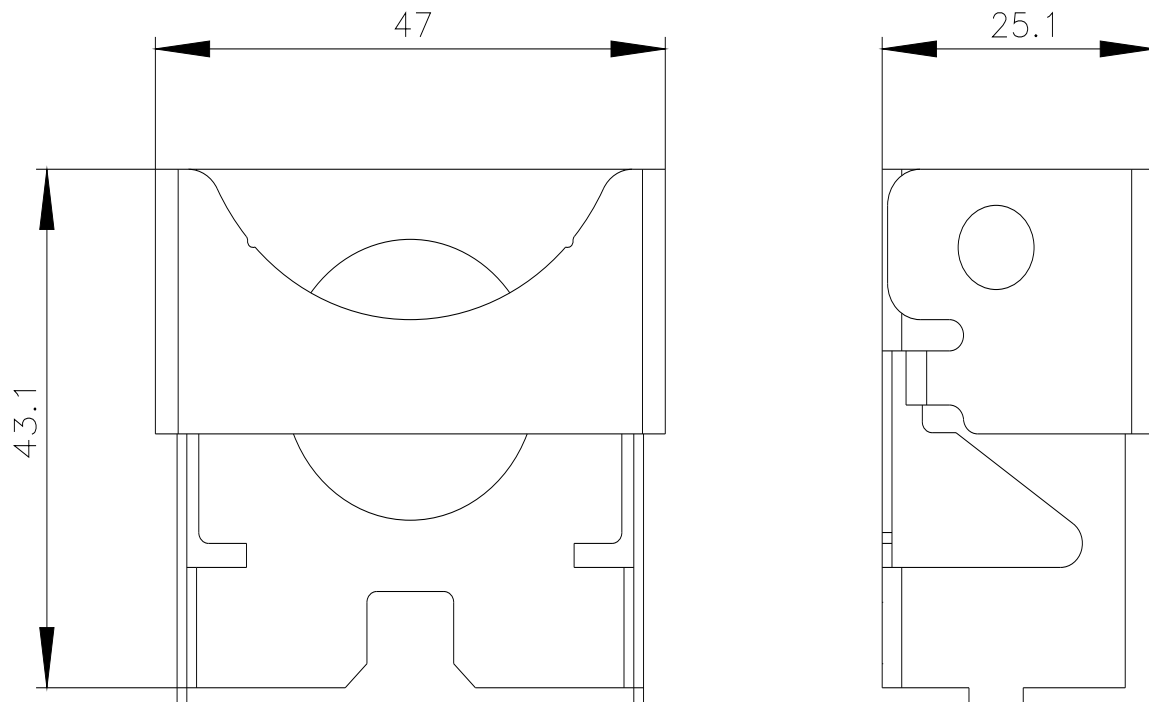

last modified:

4/2/2025 