



Key for key-operated switch O.M.R., lock number 73033, yellow

|                                                                                                                           |                                                                                              |
|---------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------|
| product brand name                                                                                                        | SIRIUS ACT                                                                                   |
| product designation                                                                                                       | Keys                                                                                         |
| design of the product                                                                                                     | OMR                                                                                          |
| product type designation                                                                                                  | 3SU1                                                                                         |
| Actuator                                                                                                                  |                                                                                              |
| key number                                                                                                                | 73033                                                                                        |
| General technical data                                                                                                    |                                                                                              |
| Substance Prohibance (Date)                                                                                               | 10/01/2014                                                                                   |
| Weight                                                                                                                    | 13 g                                                                                         |
| Ambient conditions                                                                                                        |                                                                                              |
| ambient temperature <ul style="list-style-type: none"><li>during operation</li><li>during storage and transport</li></ul> | 70 ... -25 °C<br>-40 ... +80 °C                                                              |
| environmental category during operation according to IEC 60721                                                            | 3M6, 3S2, 3B2, 3C3, 3K6 (with relative air humidity of 10 ... 95%)                           |
| Environmental footprint                                                                                                   |                                                                                              |
| Environmental Product Declaration(EPD)                                                                                    | Yes                                                                                          |
| global warming potential [CO2 eq] total                                                                                   | 0.593 kg                                                                                     |
| global warming potential [CO2 eq] during manufacturing                                                                    | 0.625 kg                                                                                     |
| global warming potential [CO2 eq] during operation                                                                        | 0.235 kg                                                                                     |
| global warming potential [CO2 eq] after end of life                                                                       | -0.267 kg                                                                                    |
| Installation/ mounting/ dimensions                                                                                        |                                                                                              |
| height                                                                                                                    | 28 mm                                                                                        |
| width                                                                                                                     | 5 mm                                                                                         |
| depth                                                                                                                     | 44.9 mm                                                                                      |
| Accessories                                                                                                               |                                                                                              |
| material of accessory                                                                                                     | Metal                                                                                        |
| color of accessory                                                                                                        | yellow                                                                                       |
| Approvals Certificates                                                                                                    |                                                                                              |
| General Product Approval                                                                                                  | Test Certificates                                                                            |
|                                        |  EG-Konf. |
|                                        |           |
| <a href="#">Type Test Certificates/Test Report</a>                                                                        | <a href="#">Special Test Certificate</a>                                                     |
| Maritime application                                                                                                      | other                                                                                        |



[Confirmation](#)

## Environment



Siemens  
EcoTech



[Environmental Con-  
firmations](#)

## Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SU1950-0FM30-0AA0>

Cax online generator



<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SU1950-0FM30-0AA0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3SU1950-0FM30-0AA0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[https://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3SU1950-0FM30-0AA0&lang=en](https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SU1950-0FM30-0AA0&lang=en)

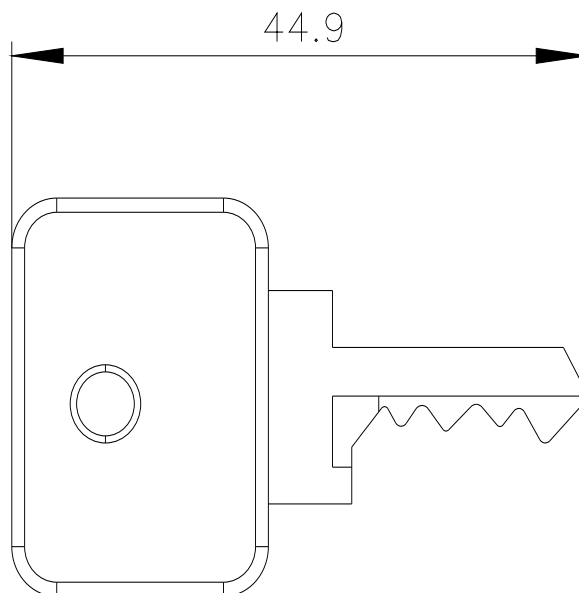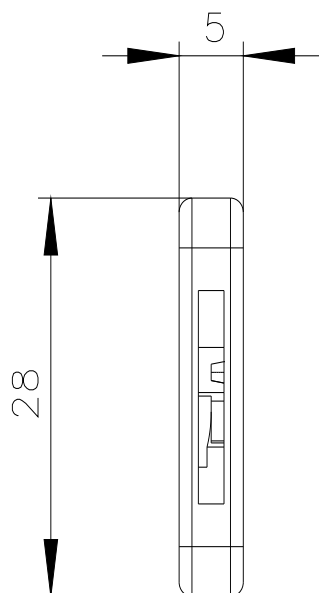

last modified:

4/2/2025