

accessory: adapter cable for RFID safety switch 3SE63, for connection to e.g. SIMATIC ET 200eco PN-F or ET 200AL-F M12 socket 8-pole at one end, M12 plug 5-pole at the other end, cable 500 mm long



General technical data

product brand name	SIRIUS
operational current at 40 °C rated value	2 A
operating voltage rated value	30 V
ambient temperature during operation	-25 ... +85 °C
overvoltage category	2
degree of pollution	3
protection class IP	IP68

Certificates/ approvals

General Product Approval	other
--------------------------	-------





[Confirmation](#)

Environment

[Environmental Confirmations](#)

Further information

Information on the packaging
<https://support.industry.siemens.com/cs/ww/en/view/109813875>
Information for data generation and storage
<https://support.industry.siemens.com/cs/ww/en/view/109995012>
Information- and Downloadcenter (Catalogs, Brochures,...)
<https://www.siemens.com/ic10>
Industry Mall (Online ordering system)
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SX5601-3SV00-1AK3>
Cax online generator
<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SX5601-3SV00-1AK3>
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
<https://support.industry.siemens.com/cs/ww/en/ps/3SX5601-3SV00-1AK3>
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)
https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SX5601-3SV00-1AK3&lang=en

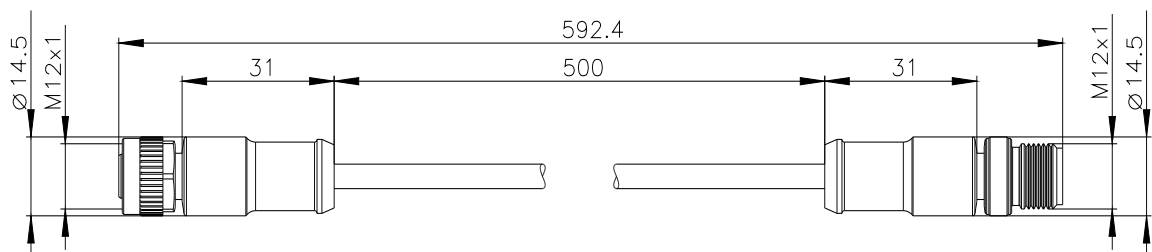

A		B
1	→	1
2	→	1
3	→	3
4	→	4
5	→	n.c.
6	→	1
7	→	2
8	→	5

