

**Siemens**  
**EcoTech**



circuit breaker 3VA2 IEC Frame 100 breaking capacity class C  $I_{cu}=110\text{ kA @ }415\text{ V}$  4-pole, line protection ETU550, LSI,  $I_n=40\text{ A}$  overload protection  $I_r=16\text{ A...}40\text{ A}$  short-circuit protection  $I_{sd}=0.6..10\times I_n$ ,  $I_i=1.5..12\times I_n$  neutral conductor protection adjustable (OFF, up to 160%) terminal connection



| Model                                                                                                 |                             |
|-------------------------------------------------------------------------------------------------------|-----------------------------|
| product brand name                                                                                    | SENTRON                     |
| product designation                                                                                   | Molded case circuit breaker |
| design of the product                                                                                 | Line protection             |
| design of the overcurrent release                                                                     | ETU550                      |
| protection function of the overcurrent release                                                        | LSI                         |
| number of poles                                                                                       | 4                           |
| General technical data                                                                                |                             |
| insulation voltage / rated value                                                                      | 800 V                       |
| operating voltage / at AC / rated value                                                               | 690 V                       |
| power loss [W] / maximum                                                                              | 1.2 W                       |
| power loss [W] / for rated value of the current / at AC / in hot operating state / per pole           | 0.4 W                       |
| mechanical service life (operating cycles) / typical                                                  | 25 000                      |
| electrical endurance (operating cycles) / at AC-1 / at 380/415 V                                      | 15 000                      |
| electrical endurance (operating cycles) / at AC-1 / at 690 V                                          | 10 500                      |
| product feature / for neutral conductors / upgradable/retrofitable / short-circuit and overload proof | No                          |
| ground-fault monitoring version                                                                       | Without                     |
| product function                                                                                      |                             |
| • communication function                                                                              | Yes                         |
| • other measurement function                                                                          | No                          |
| Net Weight                                                                                            | 3.2 kg                      |
| Current                                                                                               |                             |
| operational current                                                                                   |                             |
| • at 40 °C                                                                                            | 40 A                        |
| • at 45 °C                                                                                            | 40 A                        |
| • at 50 °C                                                                                            | 40 A                        |
| • at 55 °C                                                                                            | 40 A                        |
| • at 60 °C                                                                                            | 40 A                        |
| • at 65 °C                                                                                            | 40 A                        |
| • at 70 °C                                                                                            | 40 A                        |
| Switching capacity according to IEC 60947                                                             |                             |
| switching capacity class of the circuit breaker                                                       | C                           |
| maximum short-circuit current breaking capacity ( $I_{cu}$ )                                          |                             |
| • at 240 V                                                                                            | 150 kA                      |

|                                                                                                                                                                                                      |                                              |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------|
| <ul style="list-style-type: none"> <li>• at 415 V</li> <li>• at 440 V</li> <li>• at 500 V</li> <li>• at 690 V</li> </ul>                                                                             | 110 kA<br>110 kA<br>85 kA<br>2 kA            |
| operating short-circuit current breaking capacity (Ics) <ul style="list-style-type: none"> <li>• at 240 V</li> <li>• at 415 V</li> <li>• at 440 V</li> <li>• at 500 V</li> <li>• at 690 V</li> </ul> | 150 kA<br>110 kA<br>110 kA<br>85 kA<br>2 kA  |
| short-circuit current making capacity (Icm) <ul style="list-style-type: none"> <li>• at 240 V</li> <li>• at 415 V</li> <li>• at 440 V</li> <li>• at 500 V</li> <li>• at 690 V</li> </ul>             | 330 kA<br>242 kA<br>242 kA<br>187 kA<br>3 kA |
| <b>Adjustable parameters</b>                                                                                                                                                                         |                                              |
| product feature / for L-tripping / can be switched on/off                                                                                                                                            | No                                           |
| adjustable response value setting current (I <sub>r</sub> ) / of the L-trip / with I <sub>2t</sub> characteristic <ul style="list-style-type: none"> <li>• minimum</li> <li>• maximum</li> </ul>     | 16 A<br>40 A                                 |
| adjustable response value delay time (t <sub>r</sub> ) / for L-tripping / with I <sub>2t</sub> characteristic <ul style="list-style-type: none"> <li>• minimum</li> <li>• maximum</li> </ul>         | 0.5 s<br>25 s                                |
| adjustable response value setting current (I <sub>sd</sub> ) / of S-trip / with I <sub>0t</sub> characteristic <ul style="list-style-type: none"> <li>• minimum</li> <li>• maximum</li> </ul>        | 24 A<br>400 A                                |
| adjustable response value setting current (I <sub>sd</sub> ) / of S-trip / with I <sub>2t</sub> characteristic <ul style="list-style-type: none"> <li>• minimum</li> <li>• maximum</li> </ul>        | 24 A<br>400 A                                |
| adjustable response value delay time (t <sub>sd</sub> ) / for S-tripping / with I <sub>0t</sub> characteristic <ul style="list-style-type: none"> <li>• minimum</li> <li>• maximum</li> </ul>        | 0.05 s<br>0.5 s                              |
| adjustable response value delay time (t <sub>sd</sub> ) / for S-tripping / with I <sub>2t</sub> characteristic <ul style="list-style-type: none"> <li>• minimum</li> <li>• maximum</li> </ul>        | 0.05 s<br>0.5 s                              |
| adjustable response value setting current (I <sub>i</sub> ) / for I-tripping <ul style="list-style-type: none"> <li>• minimum</li> <li>• maximum</li> </ul>                                          | 60 A<br>480 A                                |
| adjustable setting current (I <sub>nN</sub> ) / for N-tripping <ul style="list-style-type: none"> <li>• minimum</li> <li>• maximum</li> </ul>                                                        | 16 A<br>64 A                                 |
| design of the N-conductor protection                                                                                                                                                                 | adjustable OFF; 40% to 160%                  |
| product function / grounding protection                                                                                                                                                              | No                                           |
| <b>Mechanical Design</b>                                                                                                                                                                             |                                              |
| product component <ul style="list-style-type: none"> <li>• undervoltage release</li> <li>• voltage trigger</li> <li>• trip indicator</li> </ul>                                                      | No<br>No<br>No                               |
| height [in]                                                                                                                                                                                          | 7.13 in                                      |
| height                                                                                                                                                                                               | 181 mm                                       |
| width [in]                                                                                                                                                                                           | 5.51 in                                      |
| type of connectable conductor cross-sections / of the round conductor terminal / stranded                                                                                                            | 1 x (6 - 120 mm <sup>2</sup> )               |
| width                                                                                                                                                                                                | 140 mm                                       |

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                            |                                                                                            |                                                                                             |                                                                                                             |                                                                                                                                      |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|
| depth [in]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 3.39 in                                                                                    |                                                                                            |                                                                                             |                                                                                                             |                                                                                                                                      |
| depth                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 86 mm                                                                                      |                                                                                            |                                                                                             |                                                                                                             |                                                                                                                                      |
| Connections                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                                            |                                                                                            |                                                                                             |                                                                                                             |                                                                                                                                      |
| arrangement of electrical connectors / for main current circuit                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Front terminal                                                                             |                                                                                            |                                                                                             |                                                                                                             |                                                                                                                                      |
| type of electrical connection / for main current circuit                                                                                                                                                                                                                                                                                                                                                                                                                                                          | double-sided box terminal                                                                  |                                                                                            |                                                                                             |                                                                                                             |                                                                                                                                      |
| design of the surface / of the connections / on the top of the switch (N, 1, 3, 5)                                                                                                                                                                                                                                                                                                                                                                                                                                | tin                                                                                        |                                                                                            |                                                                                             |                                                                                                             |                                                                                                                                      |
| design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6)                                                                                                                                                                                                                                                                                                                                                                                                                             | tin                                                                                        |                                                                                            |                                                                                             |                                                                                                             |                                                                                                                                      |
| Auxiliary circuit                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                                            |                                                                                            |                                                                                             |                                                                                                             |                                                                                                                                      |
| number of CO contacts / for auxiliary contacts                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 0                                                                                          |                                                                                            |                                                                                             |                                                                                                             |                                                                                                                                      |
| Accessories                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                                            |                                                                                            |                                                                                             |                                                                                                             |                                                                                                                                      |
| product extension / optional / motor drive                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Yes                                                                                        |                                                                                            |                                                                                             |                                                                                                             |                                                                                                                                      |
| Environmental conditions                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                                                            |                                                                                            |                                                                                             |                                                                                                             |                                                                                                                                      |
| protection class IP / on the front                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | IP40                                                                                       |                                                                                            |                                                                                             |                                                                                                             |                                                                                                                                      |
| ambient temperature                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                            |                                                                                            |                                                                                             |                                                                                                             |                                                                                                                                      |
| • during operation / minimum                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | -25 °C                                                                                     |                                                                                            |                                                                                             |                                                                                                             |                                                                                                                                      |
| • during operation / maximum                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 70 °C                                                                                      |                                                                                            |                                                                                             |                                                                                                             |                                                                                                                                      |
| • during storage / minimum                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | -40 °C                                                                                     |                                                                                            |                                                                                             |                                                                                                             |                                                                                                                                      |
| • during storage / maximum                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 80 °C                                                                                      |                                                                                            |                                                                                             |                                                                                                             |                                                                                                                                      |
| Environmental footprint                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                            |                                                                                            |                                                                                             |                                                                                                             |                                                                                                                                      |
| global warming potential [CO2 eq] / total                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 61.814 kg                                                                                  |                                                                                            |                                                                                             |                                                                                                             |                                                                                                                                      |
| global warming potential [CO2 eq] / during manufacturing                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 14.6 kg                                                                                    |                                                                                            |                                                                                             |                                                                                                             |                                                                                                                                      |
| global warming potential [CO2 eq] / during operation                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 48.9 kg                                                                                    |                                                                                            |                                                                                             |                                                                                                             |                                                                                                                                      |
| global warming potential [CO2 eq] / after end of life                                                                                                                                                                                                                                                                                                                                                                                                                                                             | -2.2 kg                                                                                    |                                                                                            |                                                                                             |                                                                                                             |                                                                                                                                      |
| Siemens Eco Profile (SEP)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Siemens EcoTech                                                                            |                                                                                            |                                                                                             |                                                                                                             |                                                                                                                                      |
| reference code / according to IEC 81346-2                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Q                                                                                          |                                                                                            |                                                                                             |                                                                                                             |                                                                                                                                      |
| Approvals / Certificates                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                                                            |                                                                                            |                                                                                             |                                                                                                             |                                                                                                                                      |
| General Product Approval                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                                                            |                                                                                            |                                                                                             |                                                                                                             |                                                                                                                                      |
| <div><div><br/>CCC</div><div><br/>EG-Konf.</div><div><a href="#">Confirmation</a></div><div><br/>VDE</div><div><a href="#">Miscellaneous</a></div><div></div></div> |                                                                                            |                                                                                            |                                                                                             |                                                                                                             |                                                                                                                                      |
| General Product Approval                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | EMV                                                                                        | Test Certificates                                                                          | Maritime application                                                                        |                                                                                                             |                                                                                                                                      |
|                                                                                                                                                                                                                                                                                                                                                                                                                                | <br>RCM | <a href="#">Special Test Certificate</a>                                                   | <a href="#">Type Test Certificates/Test Report</a>                                          | <a href="#">Miscellaneous</a>                                                                               | <br>ABS                                         |
| Maritime application                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                                                            |                                                                                            |                                                                                             |                                                                                                             | other                                                                                                                                |
| <br>BUREAU<br>VERITAS                                                                                                                                                                                                                                                                                                                                                                                                          | <br>DNV | <br>LRS | <br>RMRS | <a href="#">CCS (China Classification Society)</a>                                                          | <br>产品合格<br>QC PASS                             |
| other                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Dangerous goods                                                                            |                                                                                            | Environment                                                                                 |                                                                                                             |                                                                                                                                      |
| <a href="#">Confirmation</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | <a href="#">Miscellaneous</a>                                                              | <a href="#">Transport Information</a>                                                      | <br>EPD  | <br>Siemens<br>EcoTech | <br><a href="#">Environmental Confirmations</a> |
| Environment                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                                            |                                                                                            |                                                                                             |                                                                                                             |                                                                                                                                      |

## Further information

### Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

### Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

### Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/lowvoltage/catalogs>

### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA2040-7JP46-0AA0>

### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3VA2040-7JP46-0AA0>

### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


[https://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3VA2040-7JP46-0AA0](https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA2040-7JP46-0AA0)


### CAX-Online-Generator

<https://www.siemens.com/cax>

### Tender specifications

<https://www.siemens.com/specifications>

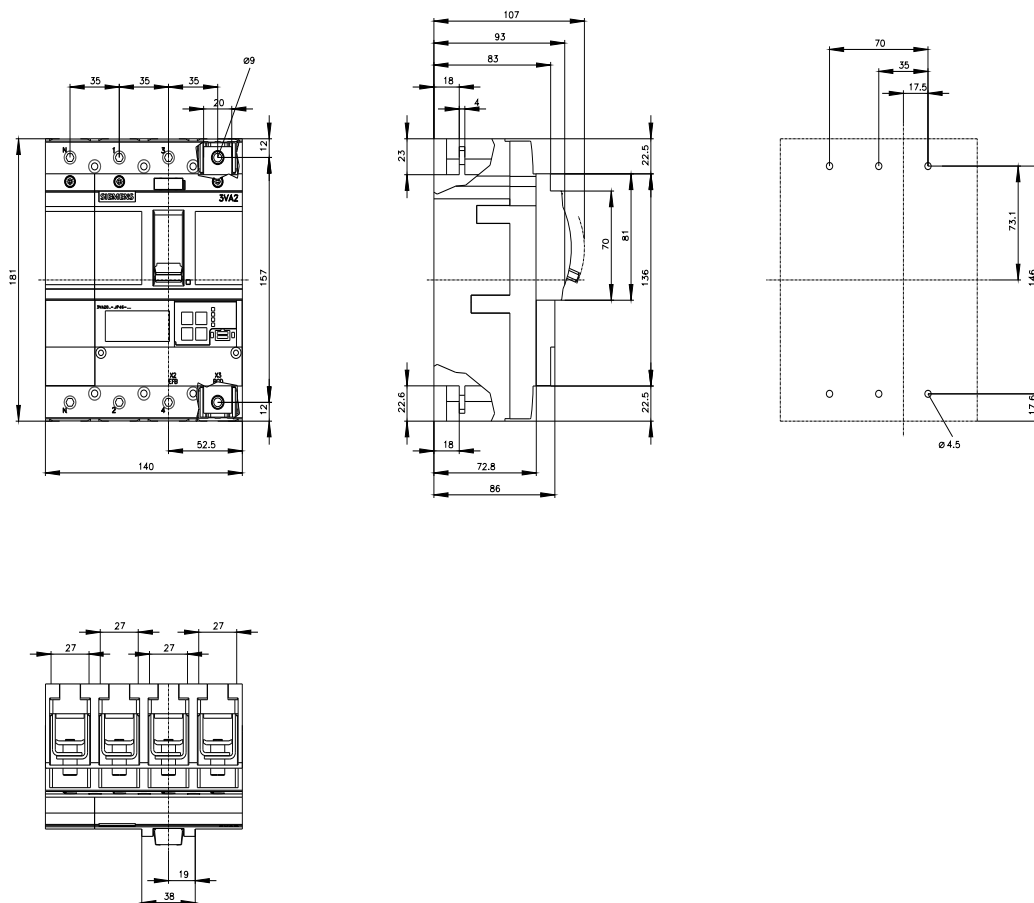

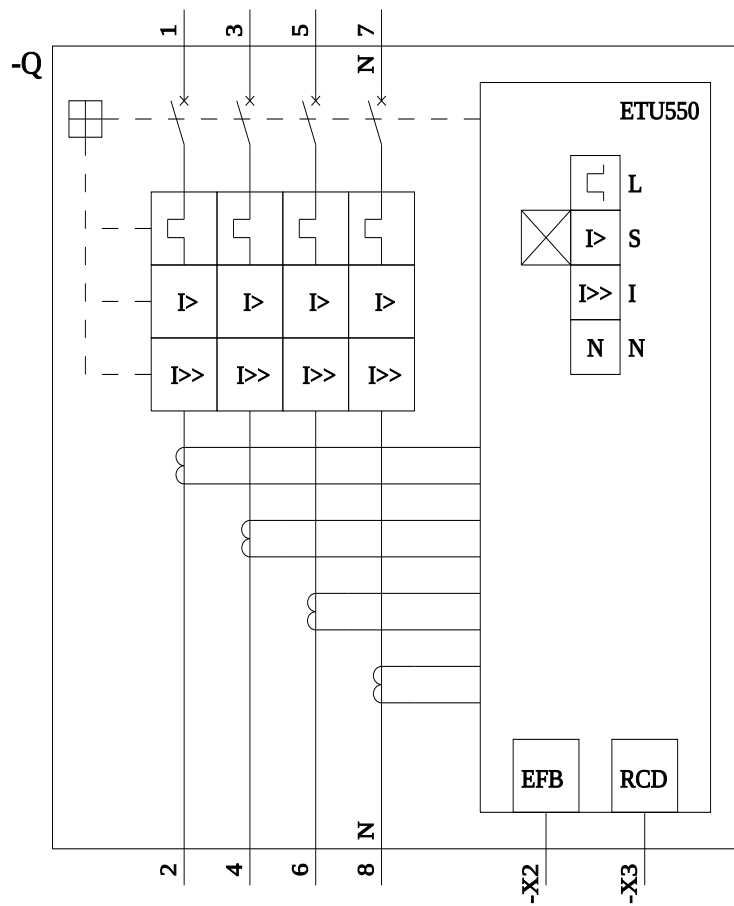

last modified:

4/3/2025 

