

Siemens
EcoTech



circuit breaker 3VA2 IEC Frame 400 breaking capacity class H Icu=85 kA @ 415 V
3-pole, line protection ETU850, LSI, In=400 A overload protection Ir=160 A...400 A
short-circuit protection Isd=0.6..10x In, li=1.5..10x In neutral conductor protection
optionally with external current transformer, up to 160% nut keeper kit



Model	
product brand name	SENTRON
product designation	Molded case circuit breaker
design of the product	Line protection
design of the overcurrent release	ETU850
protection function of the overcurrent release	LSI
number of poles	3
General technical data	
insulation voltage / rated value	800 V
operating voltage / at AC / rated value	690 V
power loss [W] / maximum	96 W
power loss [W] / for rated value of the current / at AC / in hot operating state / per pole	32 W
mechanical service life (operating cycles) / typical	20 000
electrical endurance (operating cycles) / at AC-1 / at 380/415 V	6 000
electrical endurance (operating cycles) / at AC-1 / at 690 V	4 200
product feature / for neutral conductors / upgradable/retrofitable / short-circuit and overload proof	Yes
ground-fault monitoring version	Without
product function	
• communication function	Yes
• other measurement function	Yes
Net Weight	4.745 kg
Current	
operational current	
• at 40 °C	400 A
• at 45 °C	400 A
• at 50 °C	400 A
• at 55 °C	375 A
• at 60 °C	350 A
• at 65 °C	325 A
• at 70 °C	300 A
Switching capacity according to IEC 60947	
switching capacity class of the circuit breaker	H
maximum short-circuit current breaking capacity (Icu)	
• at 240 V	110 kA

• at 415 V • at 440 V • at 500 V • at 690 V	85 kA 85 kA 55 kA 5 kA
operating short-circuit current breaking capacity (Ics) • at 240 V • at 415 V • at 440 V • at 500 V • at 690 V	110 kA 85 kA 85 kA 55 kA 5 kA
short-circuit current making capacity (Icm) • at 240 V • at 415 V • at 440 V • at 500 V • at 690 V	242 kA 187 kA 187 kA 121 kA 7.5 kA
Adjustable parameters	
product feature / for L-tripping / can be switched on/off	No
adjustable response value setting current (Ir) / of the L-trip / with I2t characteristic • minimum • maximum	160 A 400 A
adjustable response value delay time (tr) / for L-tripping / with I2t characteristic • minimum • maximum	0.5 s 17 s
adjustable response value setting current (Isd) / of S-trip / with I0t characteristic • minimum • maximum	240 A 4 000 A
adjustable response value setting current (Isd) / of S-trip / with I2t characteristic • minimum • maximum	240 A 4 000 A
adjustable response value delay time (tsd) / for S-tripping / with I0t characteristic • minimum • maximum	0.05 s 0.5 s
adjustable response value delay time (tsd) / for S-tripping / with I2t characteristic • minimum • maximum	0.05 s 0.5 s
adjustable response value setting current (Ii) / for I-tripping • minimum • maximum	600 A 4 000 A
adjustable setting current (InN) / for N-tripping • minimum • maximum	80 A 640 A
design of the N-conductor protection	adjustable OFF; 20% to 160%
product function / grounding protection	No
Mechanical Design	
product component • undervoltage release • voltage trigger • trip indicator	No No No
height [in]	9.76 in
height	248 mm
width [in]	5.43 in
width	138 mm
depth [in]	4.33 in
depth	110 mm

Connections			
arrangement of electrical connectors / for main current circuit	Front terminal		
type of electrical connection / for main current circuit	on both sides nut keeper kit		
type of connectable conductor cross-sections / for flat-bar terminal connection / minimum	20 x 1 mm		
type of connectable conductor cross-sections / for flat-bar terminal connection / maximum	35 x 10 mm		
design of the surface / of the connections / on the top of the switch (N, 1, 3, 5)	silver		
design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6)	silver		
Auxiliary circuit			
number of CO contacts / for auxiliary contacts	0		
Accessories			
product extension / optional / motor drive	Yes		
Environmental conditions			
protection class IP / on the front	IP40		
ambient temperature			
• during operation / minimum	-25 °C		
• during operation / maximum	70 °C		
• during storage / minimum	-40 °C		
• during storage / maximum	80 °C		
Environmental footprint			
global warming potential [CO2 eq] / total	495 kg		
global warming potential [CO2 eq] / during manufacturing	28.7 kg		
global warming potential [CO2 eq] / during operation	470 kg		
global warming potential [CO2 eq] / after end of life	-4.07 kg		
Siemens Eco Profile (SEP)	Siemens EcoTech		
reference code / according to IEC 81346-2	Q		
Approvals / Certificates			
General Product Approval			
 CCC  EG-Konf. Confirmation  VDE Miscellaneous 			
General Product Approval	EMV	Test Certificates	Maritime application
	 RCM	Special Test Certificate	Miscellaneous
			 ABS
			 BUREAU VERITAS
Maritime application	other		
 DNV	 LRS	 RMRS	CCS (China Classification Society)
			Confirmation
			 产品合格 QC PASS
other	Dangerous goods	Environment	
Miscellaneous	Transport Information	 EPD	 Siemens EcoTech
		Environmental Confirmations	Environmental Confirmations
Further information			

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA2340-6KP32-0AA0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3VA2340-6KP32-0AA0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA2340-6KP32-0AA0


CAX-Online-Generator

<https://www.siemens.com/cax>

Tender specifications

<https://www.siemens.com/specifications>

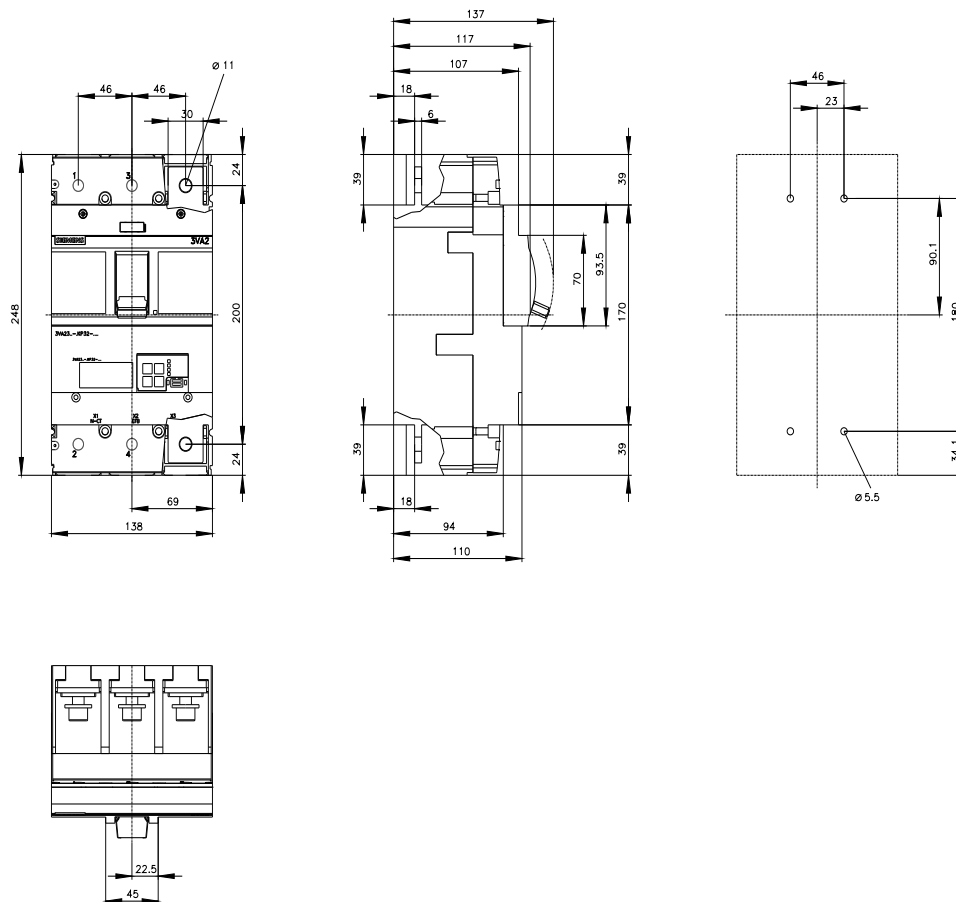

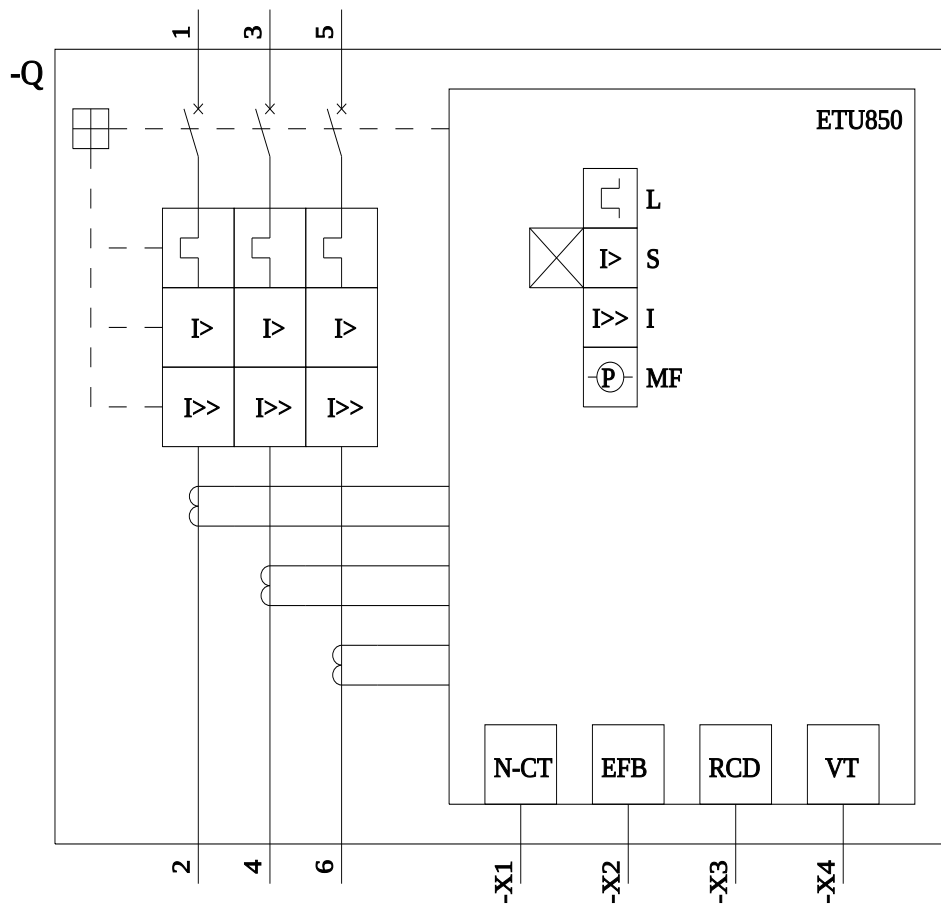

last modified:

4/3/2025

