

Siemens
EcoTech



circuit breaker 3VA2 IEC Frame 400 breaking capacity class C Icu=110 kA @ 415 V 3-pole, line protection ETU550, LSI, In=400 A overload protection Ir=160 A...400 A short-circuit protection Isd=0.6..10x In, Ii=1.5..10x In neutral conductor protection optionally with external current transformer, up to 160% nut keeper kit



Model	
product brand name	SETRON
product designation	Molded case circuit breaker
design of the product	Line protection
design of the overcurrent release	ETU550
protection function of the overcurrent release	LSI
number of poles	3
General technical data	
insulation voltage / rated value	800 V
operating voltage / at AC / rated value	690 V
power loss [W] / maximum	96 W
power loss [W] / for rated value of the current / at AC / in hot operating state / per pole	32 W
mechanical service life (operating cycles) / typical	20 000
electrical endurance (operating cycles) / at AC-1 / at 380/415 V	6 000
electrical endurance (operating cycles) / at AC-1 / at 690 V	4 200
product feature / for neutral conductors / upgradable/retrofitable / short-circuit and overload proof	Yes
ground-fault monitoring version	Without
product function	
• communication function	Yes
• other measurement function	No
Net Weight	4.665 kg
Current	
operational current	
• at 40 °C	400 A
• at 45 °C	400 A
• at 50 °C	400 A
• at 55 °C	375 A
• at 60 °C	350 A
• at 65 °C	325 A
• at 70 °C	300 A
Switching capacity according to IEC 60947	
switching capacity class of the circuit breaker	C
maximum short-circuit current breaking capacity (Icu)	
• at 240 V	150 kA

• at 415 V • at 440 V • at 500 V • at 690 V	110 kA 110 kA 85 kA 5 kA
operating short-circuit current breaking capacity (Ics)	
• at 240 V • at 415 V • at 440 V • at 500 V • at 690 V	150 kA 110 kA 110 kA 65 kA 5 kA
short-circuit current making capacity (Icm)	
• at 240 V • at 415 V • at 440 V • at 500 V • at 690 V	330 kA 242 kA 242 kA 187 kA 7.5 kA
Adjustable parameters	
product feature / for L-tripping / can be switched on/off	No
adjustable response value setting current (Ir) / of the L-trip / with I2t characteristic	
• minimum • maximum	160 A 400 A
adjustable response value delay time (tr) / for L-tripping / with I2t characteristic	
• minimum • maximum	0.5 s 17 s
adjustable response value setting current (Isd) / of S-trip / with I0t characteristic	
• minimum • maximum	240 A 4 000 A
adjustable response value setting current (Isd) / of S-trip / with I2t characteristic	
• minimum • maximum	240 A 4 000 A
adjustable response value delay time (tsd) / for S-tripping / with I0t characteristic	
• minimum • maximum	0.05 s 0.5 s
adjustable response value delay time (tsd) / for S-tripping / with I2t characteristic	
• minimum • maximum	0.05 s 0.5 s
adjustable response value setting current (Ii) / for I-tripping	
• minimum • maximum	600 A 4 000 A
adjustable setting current (InN) / for N-tripping	
• minimum • maximum	80 A 640 A
design of the N-conductor protection	adjustable OFF; 20% to 160%
product function / grounding protection	No
Mechanical Design	
product component	
• undervoltage release • voltage trigger • trip indicator	No No No
height [in]	9.76 in
height	248 mm
width [in]	5.43 in
width	138 mm
depth [in]	4.33 in
depth	110 mm

Connections		
arrangement of electrical connectors / for main current circuit	Front terminal	
type of electrical connection / for main current circuit	on both sides nut keeper kit	
type of connectable conductor cross-sections / for flat-bar terminal connection / minimum	20 x 1 mm	
type of connectable conductor cross-sections / for flat-bar terminal connection / maximum	35 x 10 mm	
design of the surface / of the connections / on the top of the switch (N, 1, 3, 5)	silver	
design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6)	silver	
Auxiliary circuit		
number of CO contacts / for auxiliary contacts	0	
Accessories		
product extension / optional / motor drive	Yes	
Environmental conditions		
protection class IP / on the front	IP40	
ambient temperature		
• during operation / minimum	-25 °C	
• during operation / maximum	70 °C	
• during storage / minimum	-40 °C	
• during storage / maximum	80 °C	
Environmental footprint		
global warming potential [CO2 eq] / total	495 kg	
global warming potential [CO2 eq] / during manufacturing	28.7 kg	
global warming potential [CO2 eq] / during operation	470 kg	
global warming potential [CO2 eq] / after end of life	-4.07 kg	
Siemens Eco Profile (SEP)	Siemens EcoTech	
reference code / according to IEC 81346-2	Q	
Approvals / Certificates		
General Product Approval		
 CCC	 EG-Konf.	
 VDE	Miscellaneous	
		
EMV	Test Certificates	Maritime application
 RCM	Special Test Certificate	Miscellaneous
		 ABS
		 BUREAU VERITAS
		 DNV
Maritime application	other	
 LRS	 RMRS	CCS (China Classification Society)
		 产品合格 QC PASS
		Confirmation
		Miscellaneous
Dangerous goods	Environment	
Transport Information	 EPD	 Siemens EcoTech
		Environmental Confirmations
		Environmental Confirmations
Further information		
Information on the packaging		

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA2340-7JP32-0AA0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3VA2340-7JP32-0AA0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA2340-7JP32-0AA0


CAX-Online-Generator

<https://www.siemens.com/cax>

Tender specifications

<https://www.siemens.com/specifications>

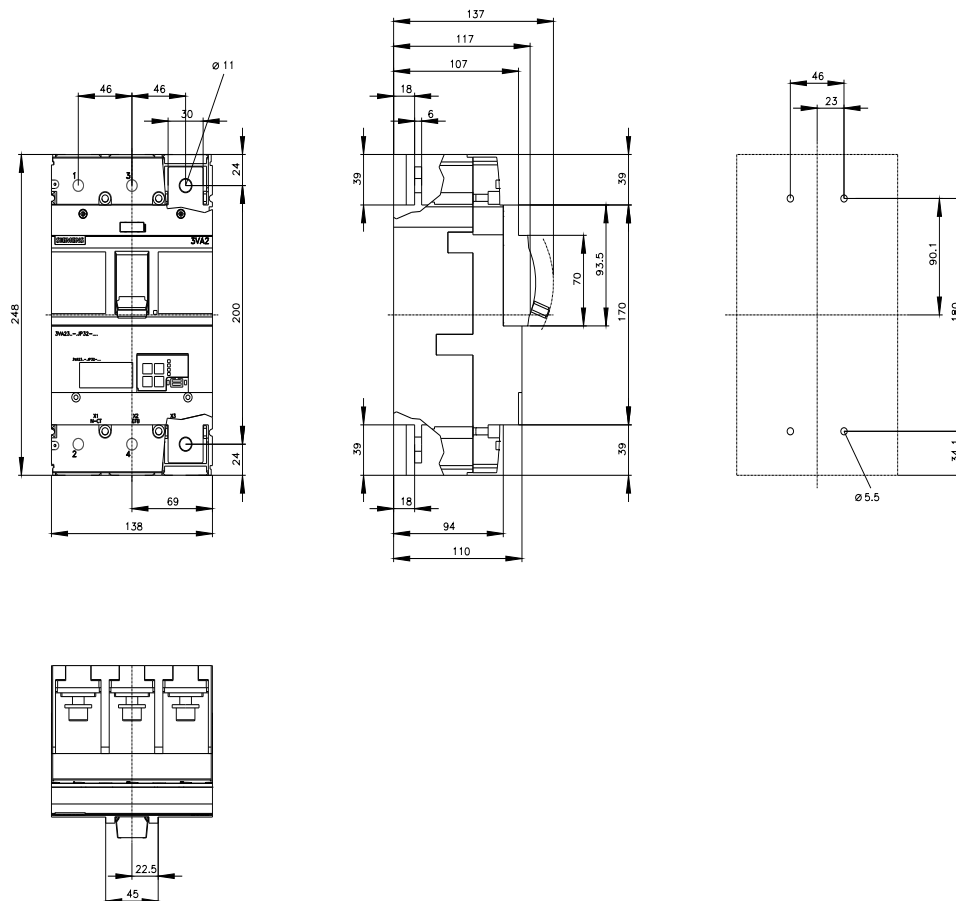

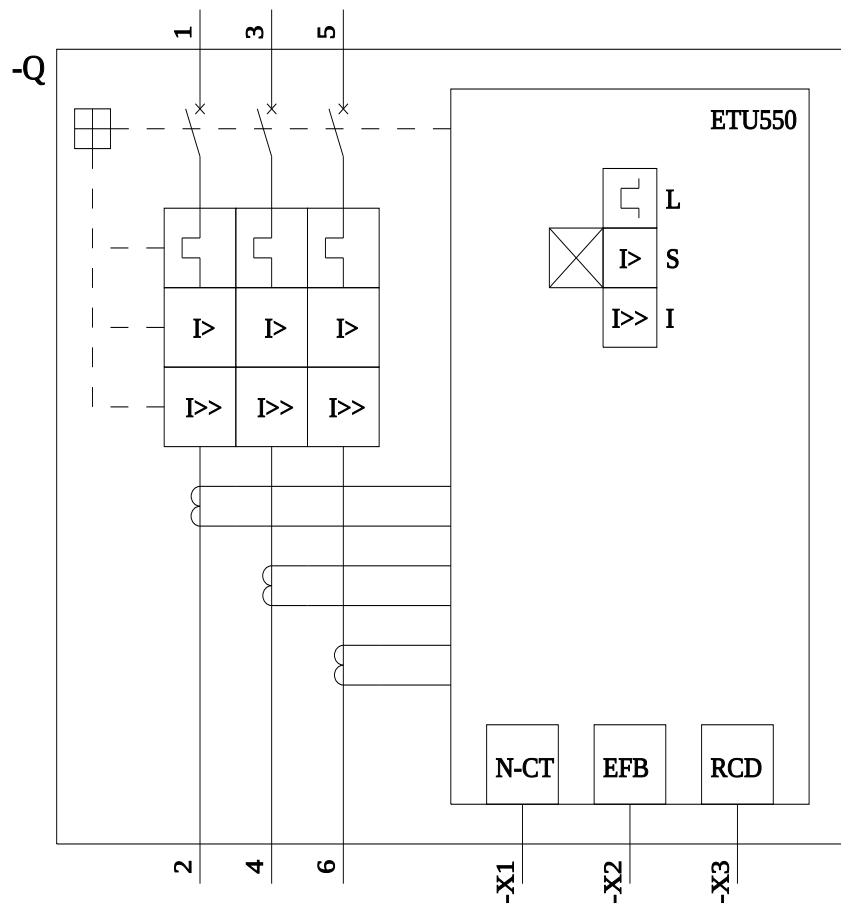

last modified:

4/3/2025

