

circular conduc. terminal TA1.0 1.5...10 mm² with aux. conductor voltage tap 3 units accessory for: 3VA10/11



Model			
product brand name		SETRON	
product designation		Circular conductor terminal voltage tap 3 units	
accessories		Wire connector	
General technical data			
designation / of the terminal		TA1.0	
type of electrical connection / with control wire tap		Yes	
Mechanical Design			
Net Weight		51 g	
Connections according IEC			
connectable conductor cross-section			
• for copper cable / stranded / minimum		1.5 mm²	
• for copper cable / stranded / maximum		10 mm²	
stripped length		12,2 mm	
tightening torque / when using copper cables			
• solid		1.5-2.5 mm²: 2.3 Nm, 4-6 mm²: 4 Nm, 10 mm²: 6.2 Nm	
• stranded		1.5-2.5 mm²: 2.3 Nm; 4-6 mm²: 4 Nm; 10 mm²: 6.2 Nm	
• finely stranded		1.5 - 2.5 mm²: 2.3 Nm, 4 - 6 mm²: 4 Nm, 10 mm²: 6.2 Nm	
• finely stranded / with core end processing		1.5 - 2.5 mm²: 2.3 Nm, 4 - 6 mm²: 4 Nm, 10 mm²: 6.2 Nm	
Connetctions according UL			
permissible temperature / of connectable conductor / according to UL 486A-486B		75 °C	
stripped length		0.48 in	
connectable conductor cross-section			
• for copper cable / solid / minimum		14 AWG	
• for copper cable / solid / maximum		10 AWG	
• for copper cable / stranded / minimum		14 AWG	
• for copper cable / stranded / maximum		8 AWG	
• for aluminum cable / stranded / minimum		8 AWG	
• for aluminum cable / stranded / maximum		8 AWG	
tightening torque / when using copper cables			
• solid		14 AWG: 20 lb-in, 12-10 AWG: 35 lb-in	
• stranded		14 AWG: 20 lb-in 12-10 AWG: 35 lb-in 8 AWG: 55 lb-in	
Certificates			
General Product Approval		EMV	Test Certificates



[Miscellaneous](#)



[Type Test Certificates/Test Report](#)

Maritime application	other	Environment
----------------------	-------	-------------



[Confirmation](#)

[Miscellaneous](#)

[Environmental Confirmations](#)

[Environmental Confirmations](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9113-0JG10>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3VA9113-0JG10>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9113-0JG10

CAX-Online-Generator

<https://www.siemens.com/cax>

Tender specifications

<https://www.siemens.com/specifications>

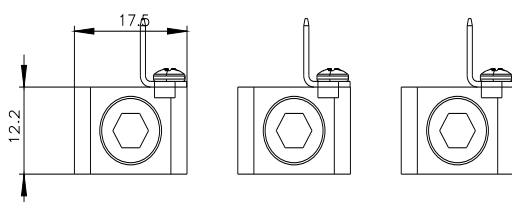

last modified:

8/8/2025

