


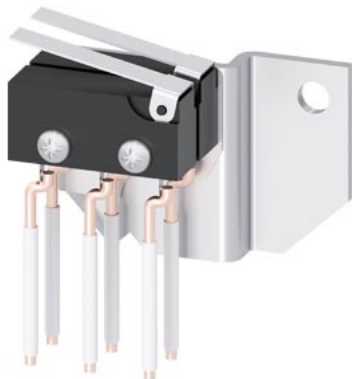

aux. switch module, rotary op. 2 auxiliary switches, OFF to ON accessory for:  
3VA57/58/59 3VA67/68/69

| Model                                                        |                         |
|--------------------------------------------------------------|-------------------------|
| product brand name                                           | SETRON                  |
| product designation                                          | Auxiliary switch module |
| accessories                                                  | Auxiliary switch module |
| General technical data                                       |                         |
| degree of pollution                                          | 3                       |
| overvoltage category                                         | III                     |
| Voltage                                                      |                         |
| surge voltage resistance                                     | 4 kV                    |
| operating voltage / at AC / according to CSA and UL          | 230 V                   |
| operating voltage / at DC / according to CSA and UL          | 24 V                    |
| operating voltage / at AC / at 50 Hz / rated value / minimum | 230 V                   |
| operating voltage / at DC / rated value / minimum            | 250 V                   |
| Current                                                      |                         |
| thermal current                                              | 5 A                     |
| operational current                                          |                         |
| • at AC-12 / at 12 V                                         | 5 A                     |
| • at AC-12 / at 24 V                                         | 5 A                     |
| • at AC-12 / at 48 V                                         | 5 A                     |
| • at AC-12 / at 125 V                                        | 5 A                     |
| • at AC-12 / at 220/240 V                                    | 5 A                     |
| • at DC-13 / at 12 V                                         | 0.2 A                   |
| • at DC-13 / at 24 V                                         | 0.2 A                   |
| • at DC-13 / at 48 V                                         | 0.2 A                   |
| • at DC-13 / at 110 V                                        | 0.2 A                   |
| • at DC-13 / at 250 V                                        | 0.2 A                   |
| • at AC-15 / at 12 V                                         | 2 A                     |
| • at AC-15 / at 24 V                                         | 2 A                     |
| • at AC-15 / at 48 V                                         | 2 A                     |
| • at AC-15 / at 125 V                                        | 2 A                     |
| • at AC-15 / at 220/240 V                                    | 2 A                     |
| Mechanical Design                                            |                         |
| Net Weight                                                   | 229 g                   |
| Connetctions according UL                                    |                         |
| ambient temperature / during operation                       |                         |
| • minimum                                                    | -25 °C                  |
| • maximum                                                    | 70 °C                   |
| ambient temperature / during storage                         |                         |
| • minimum                                                    | -40 °C                  |

• maximum

80 °C

## Certificates

### General Product Approval



[Confirmation](#)



[Miscellaneous](#)



EMV

Test Certificates

Maritime application

other

Environment



[Type Test Certificates/Test Report](#)



[Confirmation](#)

[Miscellaneous](#)

[Environmental Confirmations](#)

## Environment

[Environmental Confirmations](#)

## Further information

### Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

### Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

### Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/lowvoltage/catalogs>

### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9877-0GX32>

### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3VA9877-0GX32>

### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


[https://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3VA9877-0GX32](https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9877-0GX32)

### CAX-Online-Generator

<https://www.siemens.com/cax>

### Tender specifications

<https://www.siemens.com/specifications>

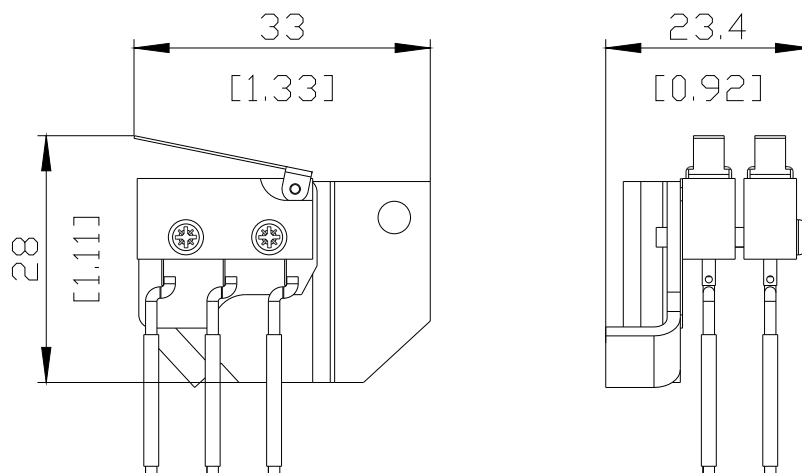

last modified:

5/26/2025

