SIEMENS

Data sheet 5SD7413-1KU04



surge arrester UL, type 1 3-pole, 480 V (delta) with remote signaling contact The device only has cULus certification and no CE marking

General data	
number of SPD ports	1
design of the product	Surge arrester
design of pole	3
fastening method	TH35 DIN rail
material of the enclosure	thermoplast
size of surge arrester	3 MW
protection class IP at connection all terminals	IP20
relative humidity during operation	0 ... 95 %
installation altitude at height above sea level maximum	2 000 m
width	54 mm
height	90 mm
depth	66 mm
net weight	397 g
Electrical data	
operating voltage	
● at AC	480 V
value range of the operating frequency	50 / 60 Hz
discharge current 1 phase at (8/20) µs maximum	50 kA
protection level	
● between L and L maximum	3 kV
● between L and PE maximum	1.8 kV
Connections/ Terminals	
type of electrical connection	Screw terminal
stripped length	12 mm
tightening torque	4 ... 5.1 N·m
connectable conductor cross-section	
● for finely stranded conductor	2.5 ... 25 mm²
● for rigid conductor	2.5 ... 25 mm²
● finely stranded	2.5 ... 25 mm²
AWG number as coded connectable conductor cross section	14 ... 4
signal design	Optical, remote signaling contact
Indicator/remote signaling	
type of voltage supply	NEC class 2 circuits
product component remote signaling contact	Yes
switching function of the remote signaling contacts	changeover contact
connectable conductor cross-section for remote signaling contacts for rigid conductor	0.34 ... 1.5 mm²
connectable conductor cross-section for remote signaling	0.34 ... 1.5 mm²

Subject to change without notice
© Copyright Siemens

contacts for finely stranded conductor	
AWG number as coded connectable conductor cross section for remote signaling contacts	22 ... 16
tightening torque for remote signaling contacts	0.2 N·m

NEMA/UL - Data

short-circuit rating (SCCR) according to UL	200 kA
type of surge protective device (SPD) according to UL	open type 1 SPD
Maximum Continuous Operating Voltage (MCOV)	
● between L and L	1 100 V
● between L and Ground (GND)	550 V
discharge current	
● between L and Ground (GND) according to UL rated value	20 kA
● between L and L according to UL rated value	20 kA
tightening torque [lbf·in]	
● with screw-type terminals	35 ... 45 lbf·in
● for remote signaling contacts	3 lbf·in
stripped length [in]	0.5 in
AWG number as coded connectable conductor cross section	
● according to UL	14 ... 4
● for remote signaling contacts according to UL	22 ... 16
ambient temperature	
● during operation	-40 ... +85 °C
● during storage	-40 ... +85 °C
installation altitude above sea level according to UL	6 562 ft
gross weight [lb] according to UL	0.88 lb(av)
net weight [lb] according to UL	0.84 lb(av)
combustibility class according to UL 94	V0
standards according to UL	UL 1449 Edition 5; CSA - C22.2 No. 269.1

Approvals Certificates

General Product Approval				other	
Confirmation	UL	UR	EAC	Confirmation	产品合格 QC PASS


Environment


Environmental Confirmations	Environmental Confirmations

Further information

Information on the packaging
https://support.industry.siemens.com/cs/ww/en/view/109813875
Information for data generation and storage
https://support.industry.siemens.com/cs/ww/en/view/109995012
Information- and Downloadcenter (Catalogs, Brochures,…)
https://www.siemens.com/lowvoltage/catalogs
Industry Mall (Online ordering system)
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5SD7413-1KU04
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
https://support.industry.siemens.com/cs/ww/en/ps/5SD7413-1KU04
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SD7413-1KU04
CAx-Online-Generator
https://www.siemens.com/cax

Subject to change without notice
© Copyright Siemens

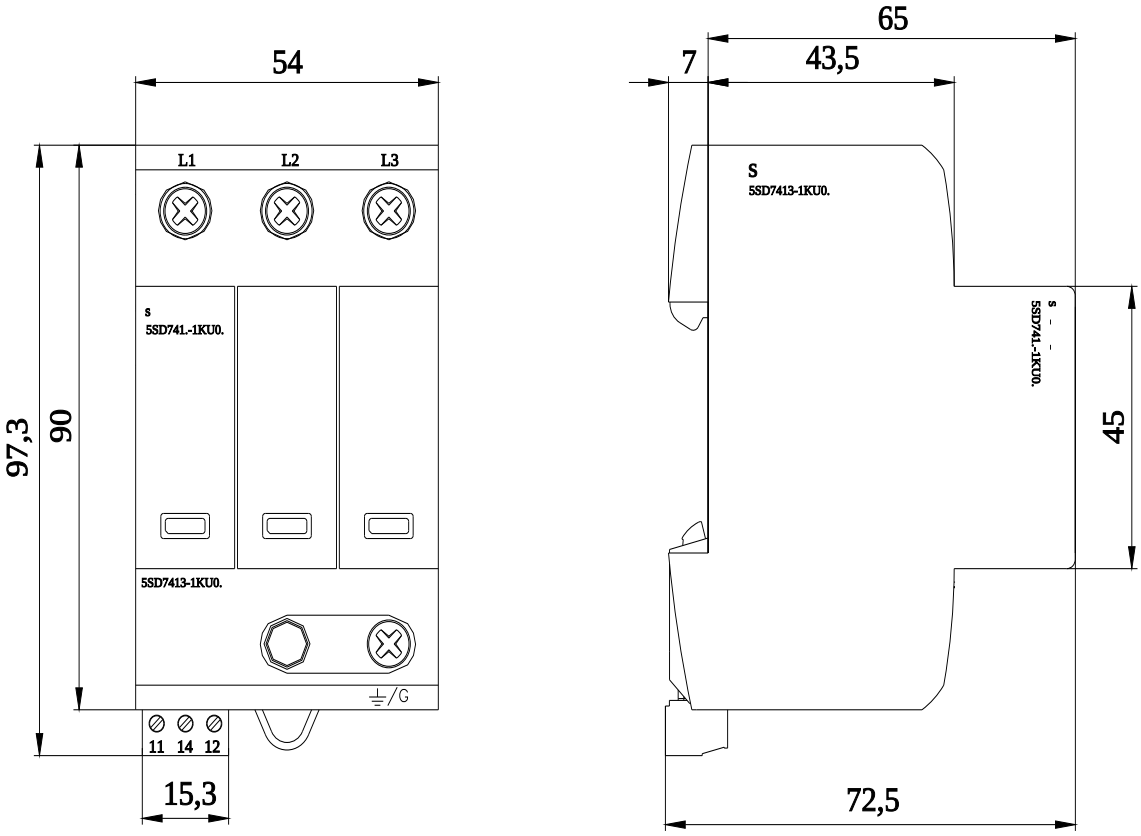

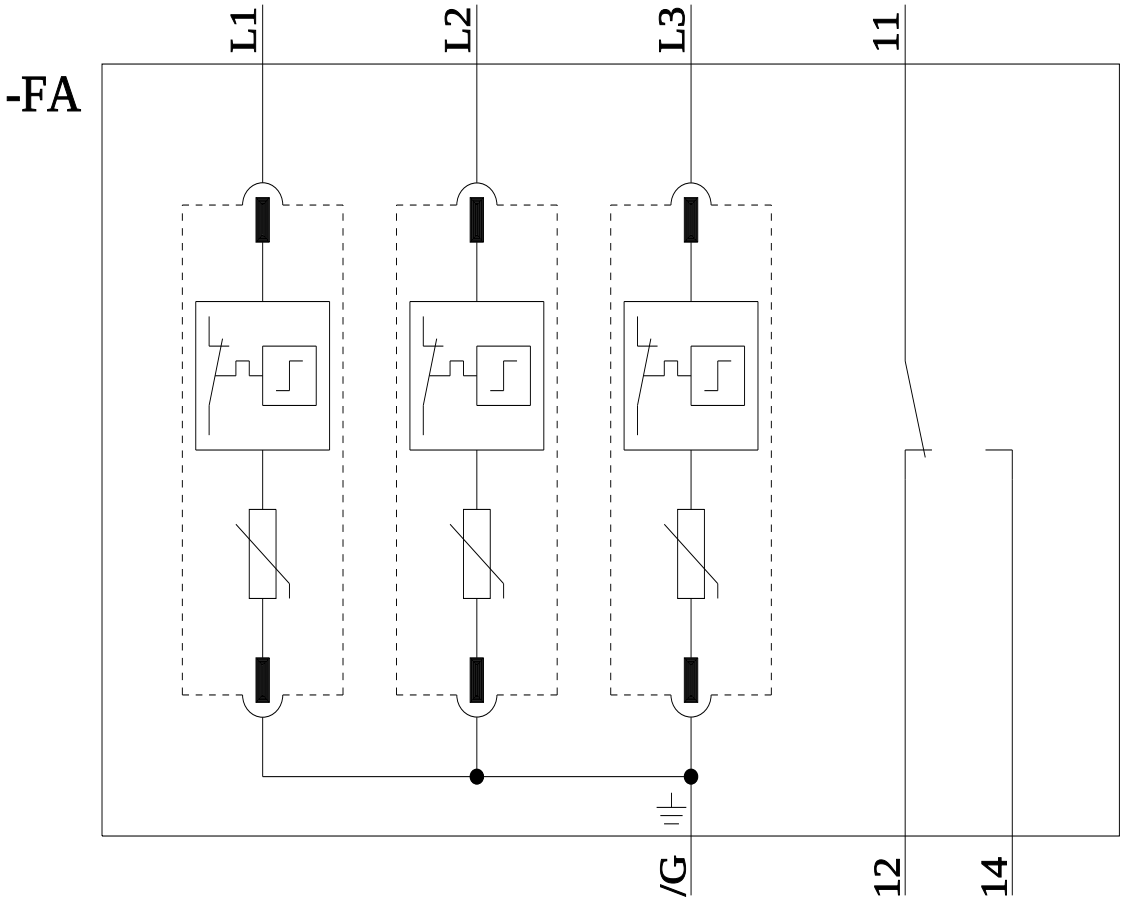

last modified: 8/7/2025

Subject to change without notice
© Copyright Siemens

Subject to change without notice
© Copyright Siemens