SIEMENS

Data sheet 5ST3016



auxiliary switch 1 CO for miniature circuit breakers 5SL, 5SY, 5SP, incorporated switch 5TL1, RCBO 5SU1 (without 5SU1…FP/FR), RCCB 5SV (for 5SU1, handle coupler 5ST3805-1 is required)

Model	
product brand name	SENTRON
product designation	auxiliary switches
design of the product	Mountable
design of the product factory mounted	No
electrical endurance (operating cycles) typical	10 000
Voltage	
insulation voltage rated value	440 V
surge voltage resistance rated value	4 kV
Supply voltage	
supply voltage at DC rated value	
● minimum	5 V
operating voltage	
● rated value	30 V
● at AC rated value minimum	12 V
● at DC rated value minimum	12 V
protection class IP	IP20
Control current	
type of voltage of control voltage	AC/DC
Product details	
product component	
● auxiliary switch	Yes
number of fault signal contacts	0
number of NC contacts	0
number of NO contacts	0
number of CO contacts	1
product extension can be mounted	Universal
product extension	auxiliary switch
product function test function for fault current trip	No
Connections	
connectable conductor cross-section	
● minimum	0.5 mm²
● maximum	2.5 mm²
AWG number as coded connectable conductor cross section	
● minimum	24
● maximum	12
tightening torque with screw-type terminals	
● maximum	0.5 N·m

Subject to change without notice
© Copyright Siemens

Mechanical Design	
height	90 mm
width	9 mm
depth	70 mm
number of modular width units	1
Net Weight	54 g
Environmental conditions	
standard	IEC/EN60947-5-1; IEC/EN62019
ambient temperature during operation	
• minimum	-25 °C
• maximum	55 °C
ambient temperature during storage minimum	-40 °C
Environmental footprint	
Environmental Product Declaration(EPD)	Yes
global warming potential [CO2 eq] total	4.1 kg
global warming potential [CO2 eq] during manufacturing	0.527 kg
global warming potential [CO2 eq] during operation	3.52 kg
global warming potential [CO2 eq] after end of life	0.055 kg

Approvals Certificates

General Product Approval

CCC EG-Konf. UR VDE Miscellaneous


General Product Approval	Maritime application	other		
EAC	DNV LRS	Confirmation	产品合格 QC PASS	Miscellaneous


Railway	Environment			
Special Test Certificate	EPD	EPD	Environmental Confirmations	Environmental Confirmations

Further information


Information on the packaging
https://support.industry.siemens.com/cs/ww/en/view/109813875
Information for data generation and storage
https://support.industry.siemens.com/cs/ww/en/view/109995012
Information- and Downloadcenter (Catalogs, Brochures,…)
https://www.siemens.com/lowvoltage/catalogs
Industry Mall (Online ordering system)
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5ST3016
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
https://support.industry.siemens.com/cs/ww/en/ps/5ST3016
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5ST3016
CAx-Online-Generator
https://www.siemens.com/cax
Tender specifications
https://www.siemens.com/specifications

© Copyright Siemens

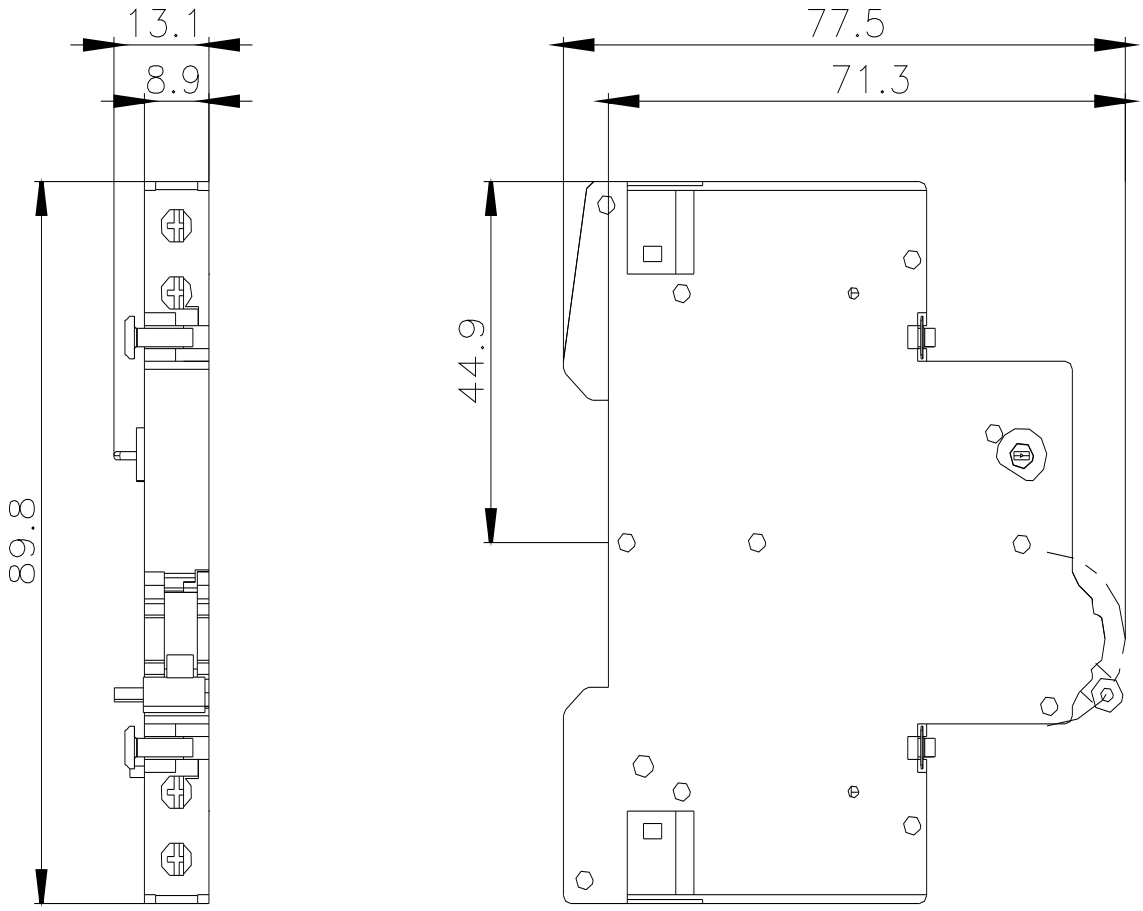

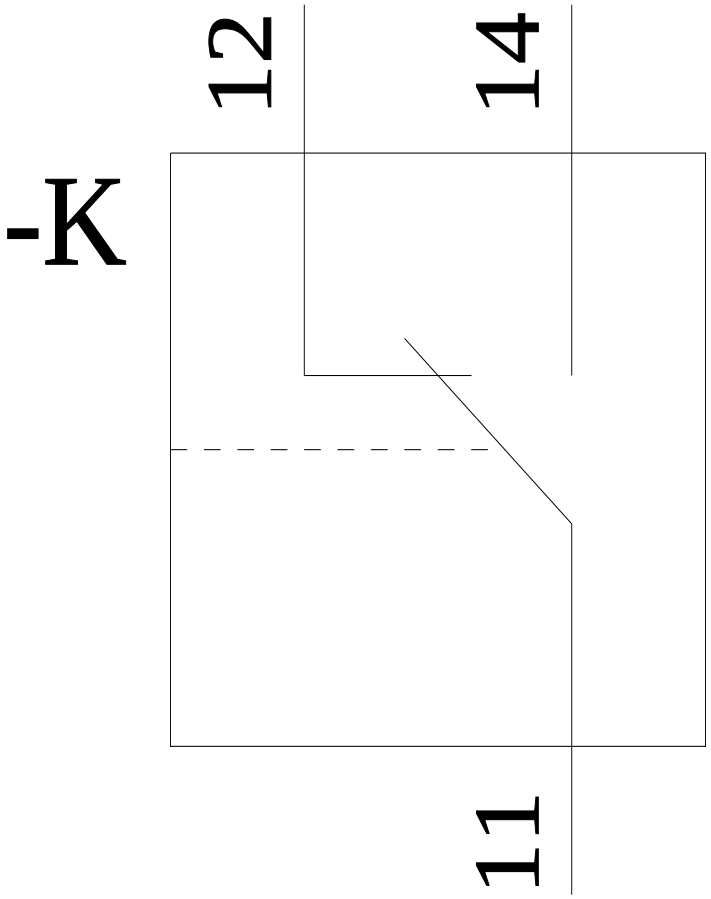

Subject to change without notice
© Copyright Siemens

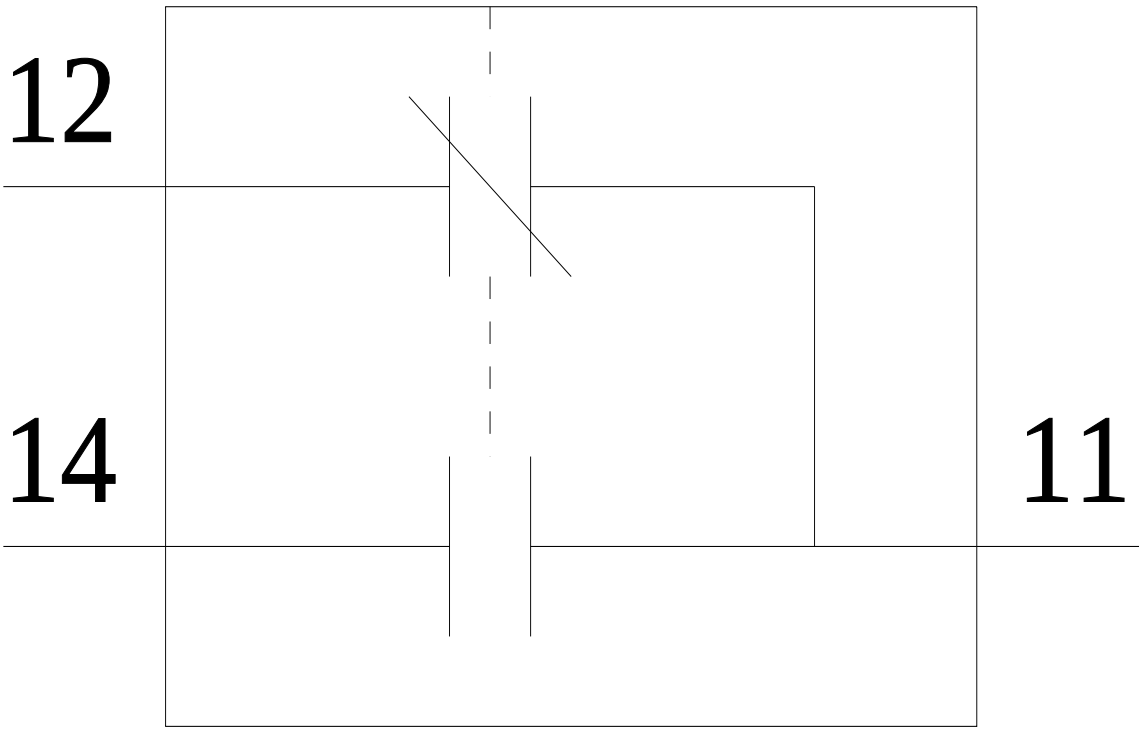

last modified: 11/24/2025

Subject to change without notice
© Copyright Siemens

Subject to change without notice
© Copyright Siemens