
SIEMENS

Data sheet 6ES7963-1AA10-0AA0

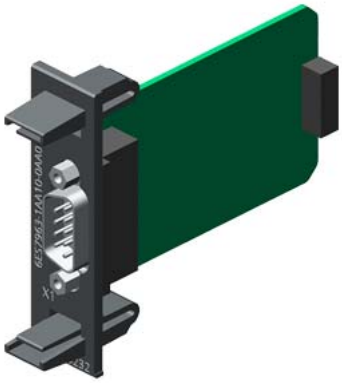

SIMATIC S7-400, interface module IF963-RS232 with RS232 interface for PTP coupling with CP441 AB CP 441- AA05

Input current	
Current consumption, max.	15 mA
Power loss	
Power loss, typ.	0.05 W
Interfaces	
Point-to-point connection	
● Transmission rate, max.	115.2 kbit/s
● Cable length, max.	15 m
Dimensions	
Width	19 mm
Height	67 mm
Depth	87 mm
Weights	
Weight, approx.	80 g

Classifications

	Version	Classification
eClass	14	27-24-22-08
eClass	12	27-24-22-08
eClass	9.1	27-24-22-08
eClass	9	27-24-22-08
eClass	8	27-24-22-08
eClass	7.1	27-24-22-08
eClass	6	27-24-22-08
ETIM	10	EC001423
ETIM	9	EC001423
ETIM	8	EC001423
ETIM	7	EC001423
IDEA	4	3564
UNSPSC	15	32-15-17-05

Approvals / Certificates

General Product Approval

CE EG-Konf. | Miscellaneous | UKCA | China RoHS | UL | KC

Subject to change without notice
© Copyright Siemens

General Product Approval	For use in hazardous locations				
			FM		

For use in hazardous locations	Maritime application				
Type Examination Certificate					

Maritime application
CCS (China Classification Society)

last modified: 6/7/2025

Subject to change without notice
© Copyright Siemens