



circuit breaker 3VA2 IEC Frame 1000 breaking capacity class M Icu=55 kA @ 415 V 3-pole, line protection ETU860, LSIG, In=630 A overload protection Ir=250 A...630 A short-circuit protection Isd=0.6..10x In, li=1.5..12x In neutral conductor protection optionally with external current transformer, up to 160% ground-fault protection, can be switched off Ig=0.2...1 x In, tg=0.05-0.8s nut keeper kit

Model	
product brand name	SENTRON
product designation	Molded case circuit breaker
design of the product	Line protection
design of the overcurrent release	ETU860
protection function of the overcurrent release	LSIG
number of poles	3
General technical data	
insulation voltage / rated value	800 V
operating voltage / at AC / rated value	690 V
power loss [W] / maximum	144 W
power loss [W] / for rated value of the current / at AC / in hot operating state / per pole	48 W
mechanical service life (operating cycles) / typical	10 000
electrical endurance (operating cycles) / at AC-1 / at 380/415 V	4 600
electrical endurance (operating cycles) / at AC-1 / at 690 V	3 200
product feature / for neutral conductors / upgradable/retrofitable / short-circuit and overload proof	Yes
ground-fault monitoring version	Summation current formation L-conductor
product function	
• communication function	Yes
• other measurement function	Yes
Net Weight	13.841 kg
Current	
operational current	
• at 40 °C	630 A
• at 45 °C	630 A
• at 50 °C	630 A
• at 55 °C	630 A
• at 60 °C	630 A
• at 65 °C	630 A
• at 70 °C	630 A
Switching capacity according to IEC 60947	
switching capacity class of the circuit breaker	M
maximum short-circuit current breaking capacity (Icu)	
• at 240 V	85 kA
• at 415 V	55 kA
• at 440 V	55 kA
• at 500 V	36 kA

• at 690 V	25 kA
operating short-circuit current breaking capacity (Ics)	
• at 240 V	85 kA
• at 415 V	55 kA
• at 440 V	55 kA
• at 500 V	36 kA
• at 690 V	19 kA
short-circuit current making capacity (Icm)	
• at 240 V	187 kA
• at 415 V	121 kA
• at 440 V	121 kA
• at 500 V	75.6 kA
• at 690 V	52.5 kA
Adjustable parameters	
product feature / for L-tripping / can be switched on/off	No
adjustable response value setting current (Ir) / of the L-trip / with I2t characteristic	
• minimum	252 A
• maximum	630 A
adjustable response value delay time (tr) / for L-tripping / with I2t characteristic	
• minimum	0.5 s
• maximum	25 s
adjustable response value setting current (Isd) / of S-trip / with I0t characteristic	
• minimum	378 A
• maximum	6 300 A
adjustable response value setting current (Isd) / of S-trip / with I2t characteristic	
• minimum	378 A
• maximum	6 300 A
adjustable response value delay time (tsd) / for S-tripping / with I0t characteristic	
• minimum	0.05 s
• maximum	0.5 s
adjustable response value delay time (tsd) / for S-tripping / with I2t characteristic	
• minimum	0.05 s
• maximum	0.5 s
adjustable response value setting current (Ii) / for I-tripping	
• minimum	945 A
• maximum	7 560 A
adjustable current response value current / for G-tripping / with standard characteristic	
• initial value	126 A
• full-scale value	630 A
adjustable response value delay time (tg) / for G-tripping / with I0t characteristic	
• minimum	0.05 s
• maximum	0.8 s
adjustable response value setting current (Ig) / for G-tripping / with I2t characteristic	
• minimum	126 A
• maximum	630 A
adjustable response value delay time (tg) / for G-tripping / with I2t characteristic	
• minimum	0.05 s
• maximum	0.8 s
adjustable setting current (InN) / for N-tripping	
• minimum	126 A
• maximum	1 008 A
design of the N-conductor protection	adjustable OFF; 20% to 160%

product function / grounding protection	Yes				
Mechanical Design					
product component					
• undervoltage release	No				
• voltage trigger	No				
• trip indicator	No				
height [in]	12.6 in				
height	320 mm				
width [in]	8.27 in				
width	210 mm				
depth [in]	4.72 in				
depth	120 mm				
Connections					
arrangement of electrical connectors / for main current circuit	Front terminal				
type of electrical connection / for main current circuit	on both sides nut keeper kit				
type of connectable conductor cross-sections / for flat-bar terminal connection / minimum	20 x 4 mm				
type of connectable conductor cross-sections / for flat-bar terminal connection / maximum	50 x 28 mm				
design of the surface / of the connections / on the top of the switch (N, 1, 3, 5)	silver				
design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6)	silver				
Auxiliary circuit					
number of CO contacts / for auxiliary contacts	0				
Accessories					
product extension / optional / motor drive	No				
Environmental conditions					
protection class IP / on the front	IP40				
ambient temperature					
• during operation / minimum	-25 °C				
• during operation / maximum	70 °C				
• during storage / minimum	-40 °C				
• during storage / maximum	80 °C				
reference code / according to IEC 81346-2	Q				
Approvals / Certificates					
General Product Approval					
 CCC  EG-Konf.  Confirmation  VDE Miscellaneous					
General Product Approval	EMV	Test Certificates	Maritime application		
	 RCM	Miscellaneous	Special Test Certificate	Type Test Certificates/Test Report	 ABS
Maritime application				other	
 BUREAU VERITAS	 DNV	 LRS	 RMRS	CCS (China Classification Society)	Confirmation
other	Dangerous goods	Environment			

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA2563-5KQ32-0AA0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3VA2563-5KQ32-0AA0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA2563-5KQ32-0AA0


CAX-Online-Generator

<https://www.siemens.com/cax>

Tender specifications

<https://www.siemens.com/specifications>

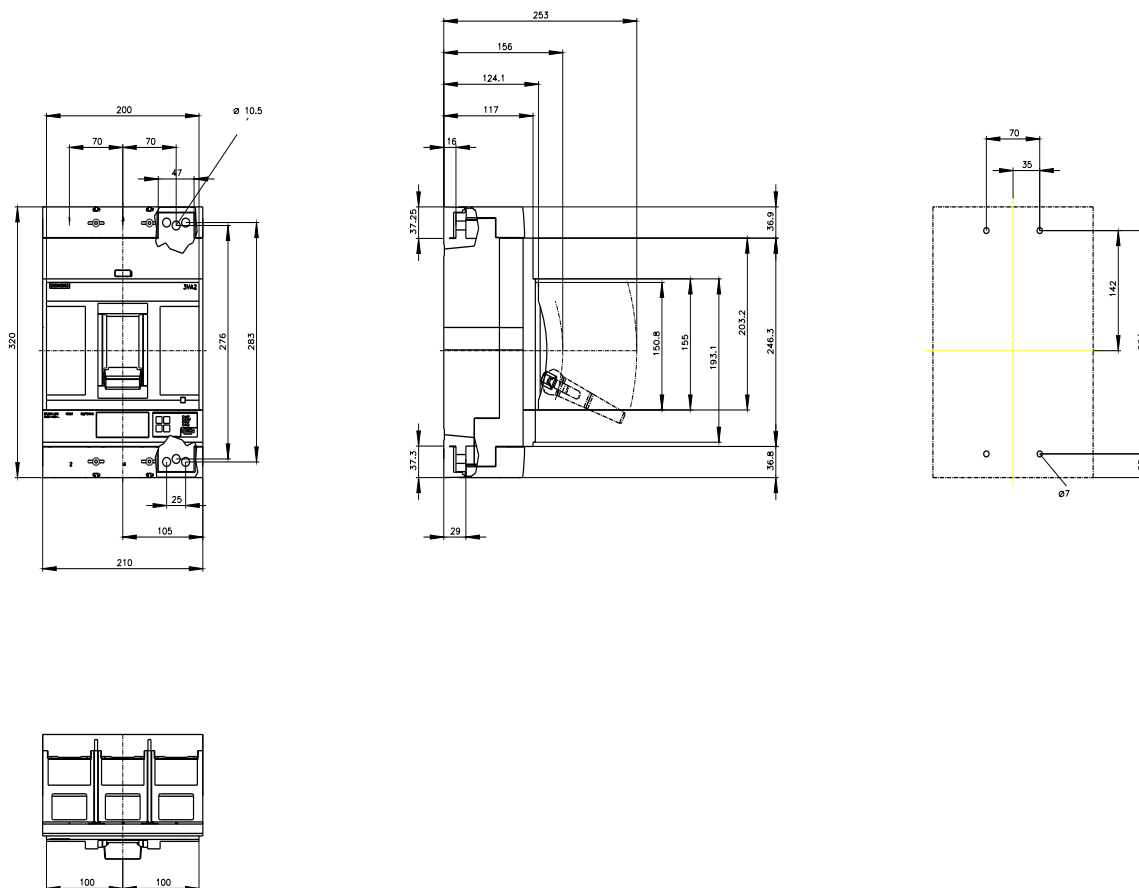

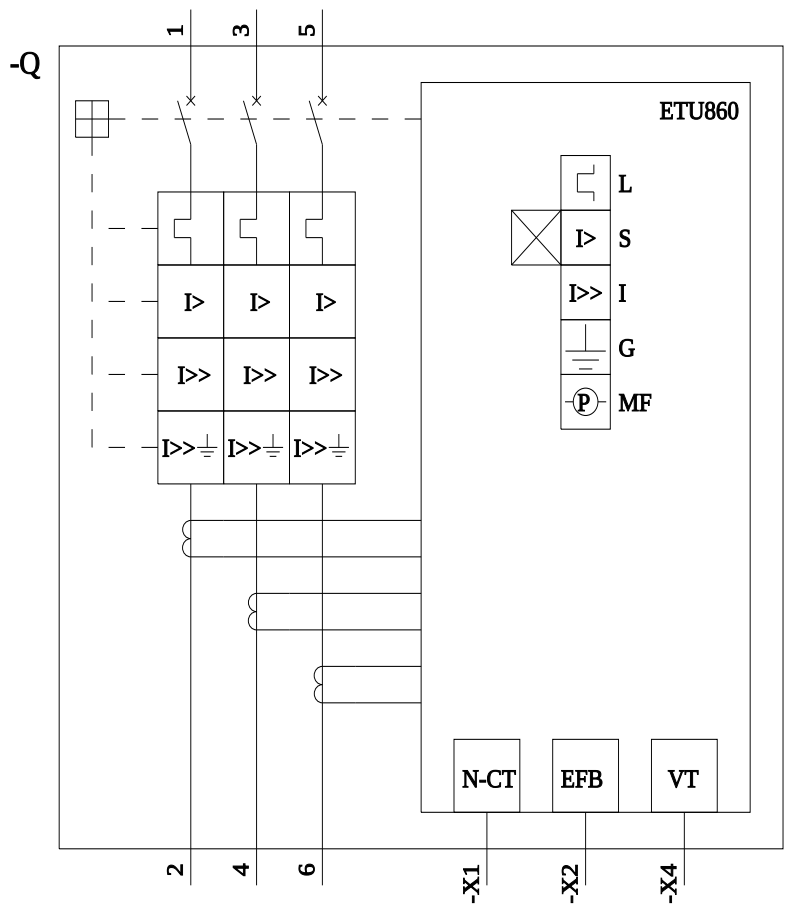

last modified: 5/25/2025

